






Product Dimensions:

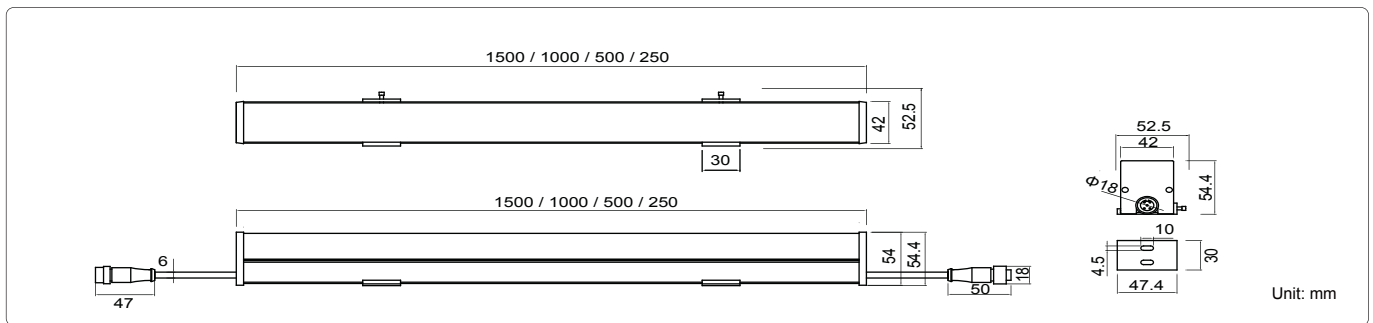

Luminous Intensity Distribution Diagram:

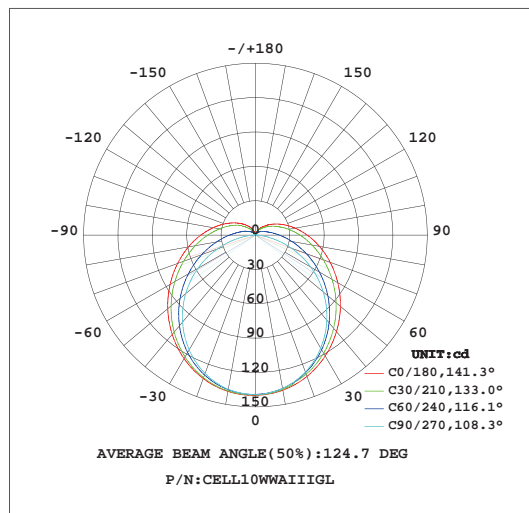

Lux Distribution:

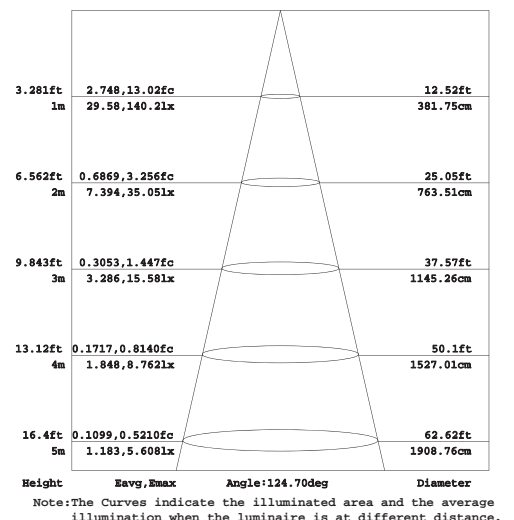

Manufacturing Quality Standard:

- ISO 9001:2008

LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1
- UL

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- L70
- Switching cycle: 100,000x

Features:

- Surface-mounted type
- Integrated fired-resistant (V0)IP67 U.S.S. 5Pin connectors
- Straight line installation will not have the dark areas
- Protection class I
- Optional stainless steel mounting clip
- Optional 1~10 driver for dimming control
- Optional Dali driver for dimming control
- Optional DMX driver for dimming control

Applications:


- Outdoor plaza
- The house of contours
- Bridges
- Landscape lighting
- Ballrooms



Specifications:

Power	6W	10W
Size(length)	600mm	1000mm
Input Voltage	DC 24V	
Power Factor	>0.9	
Beam Angle	140°	
Color Rendering Index	80	
Luminaire Efficacy	80lm/w(2700K),85lm/w(3000K),95lm/w(4000K),100lm/w(5000K),105lm/w(6500K)	
LED Source Efficacy	90lm/w (2700K), 95lm/w (3000K),110lm/w (4000K),115lm/w (5000K),120lm/w(6500K)	
LED Source	Taiwan	
Life Time	50,000 Hours at Ta=25°C	
Operating Temperature	-20°C~70°C	
Operating Humidity	0~90%RH	
Impact class	IK10	
Finishing Materials	Extruded Aluminium Alloy and UV Resistive PC	
Body Color	Silver / Matte Grey / Matte Black	
RAL Color Code	RAL 9006 / RAL 7042 / RAL 9017	
Net Weight	1.2kg	

Ordering Part No.:

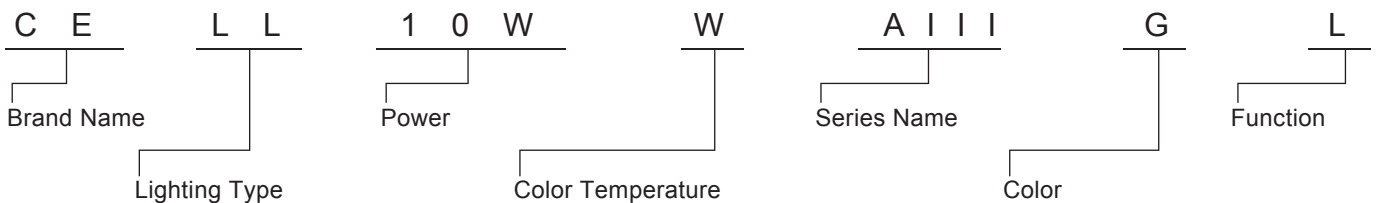

Brand Name	Lighting Type	Power	Color Temperature	Series Name	Color	Function
CE: CELEX	LL: Linear Light	06W 10W	O: 2700K W: 3000K N: 4000K D: 5000K C: 6500K	AIII: Series Name	S: Silver G: Matte Grey B: Matte Black	D: DMX 512 Dimming L: DC 24V T: Triac Dimming Leading Edge V: 1~10V Dimming I: Dali Dimming