




Product Dimensions:

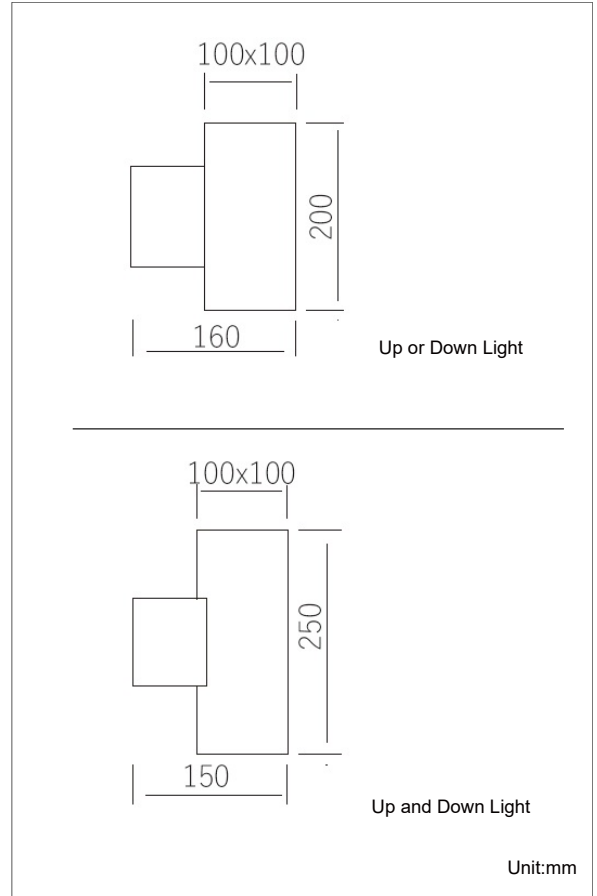

Luminous Intensity Distribution Diagram:

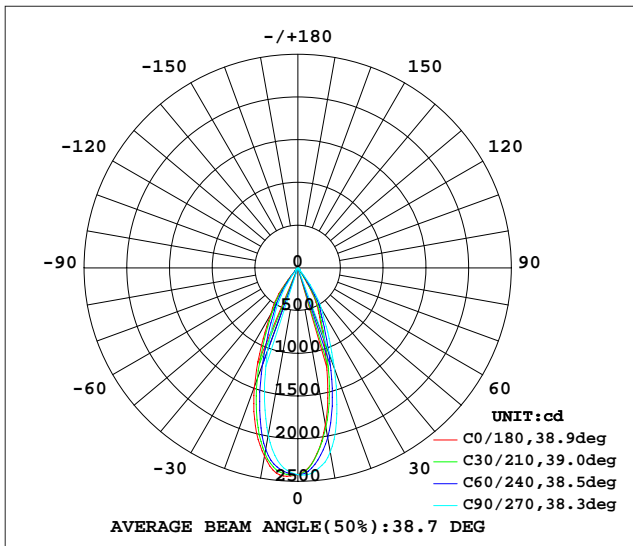

Lux Distribution:

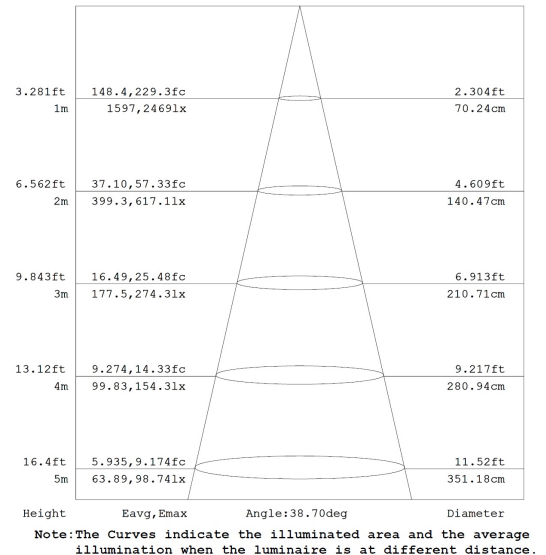

Manufacturing Quality Standard:

- ISO 9001:2008

LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- Switching cycle:100,000x

Features:

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- Dupont outdoor electrostatic powder painting.
- #304 stainless steel fastness parts
- 4mm thickness tempered glass.
- Fire-resistance silicon seal gasket.

Applications:


- Public squares
- Parks
- Building
- Hotel



Specifications:

Power	15W	30W
Type	UP or Down Light	UP and Down Light
Input Voltage	AC 220~240V 50/60Hz	
Beam Angle	15° / 24° / 36°	
Color Rendering Index	80	
Housing Materials	Aluminum and Tempered Glass	
Luminaire Efficacy	65lm/w (3000K), 70lm/w (4000K), 75lm/w (6500K)	
LED Source Efficacy	85lm/w (3000K), 90lm/w (4000K), 95lm/w (6500K)	
Operating Temperature	-20~50°C	
LED Source	CREE	
Life Time	50,000 Hours at Ta=40°C	
Operating Humidity	10%~90%RH	
Body Color	Matte Black / Matte Grey	
RAL Color Code	RAL9017 / RAL9007	

Ordering Part No.:

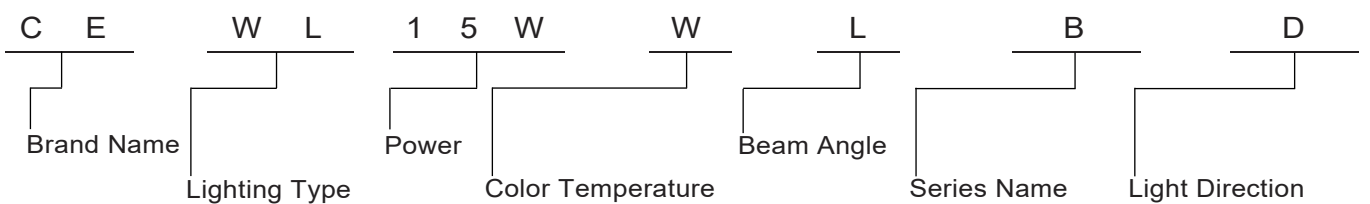

Brand Name	Lighting Type	Power	Color Temperature	Beam Angle	Series Name	Light Direction
CE: CELEX	WL: Wall Light	15W 30W	W: 3000K N: 4000K C: 6500K	M:15° L:24° X:36°	B: BOBO Series	U: Up Light D: Down Light UD: Up and Down Light