



**Luminous Intensity Distribution Diagram:**

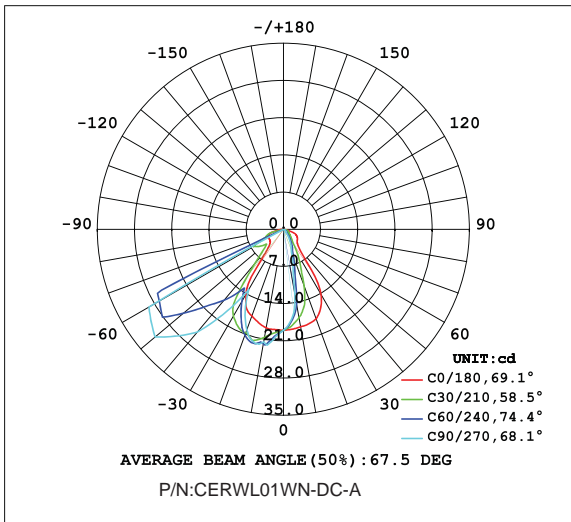

**Lux Distribution:**

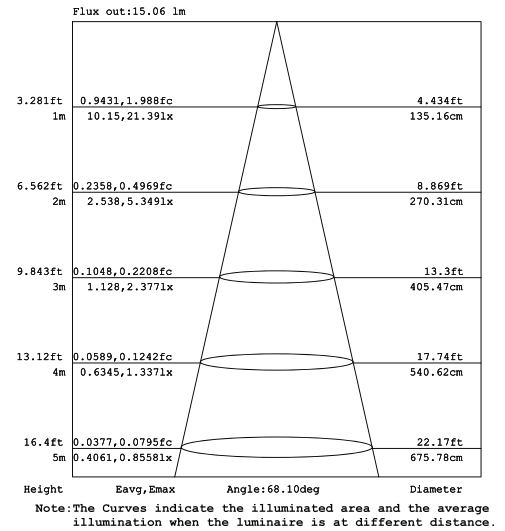

**Manufacturing Quality Standard:**

- ISO 9001:2008

**LED Luminaire Standard:**

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

**Electronic Driver Standard:**

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

**LED Module Standard:**

- IEC 62031
- IEC 60838-2-2

**RoHS Standard:**

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

**LED Luminaire Performance:**

- LM-80-08
- Switching cycle:100,000x

**LED Light Photometric Standard:**

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

**Features:**

- Life time:50,000 hours
- Surface electrostatic spray coating
- Excellent cooling system
- Green and eco-friendly without mercury
- Precise light distribution system make beam focus,decrease pollution

**Applications:**

- Wall light
- Public squares
- Parks
- Foyer landscaping
- Swimming pools



**Specifications:**


Part No	CCT (K)	Beam Angle	Luminaire Luminous Flux (lm)	Input Current (mA)	Power (W)
CERWL01WW-DC-A	3000±200	67.5°	35	350	1
CERWL01WN-DC-A	4000±200	67.5°	40	350	1
CERWL01WC-DC-A	6500±200	67.5°	48	350	1
CERWL03WW-DC-A	3000±200	67.5°	70	700	3
CERWL03WN-DC-A	4000±200	67.5°	80	700	3
CERWL03WC-DC-A	6500±200	67.5°	96	700	3

**Products Characteristic:**

- Input Voltage: DC 3.0~3.2V
- Operating Temperature:-20°C ~ 50°C
- Operation Humidity: 0~95%
- Life Time: 50,000 Hours
- Housing Materials: Aluminum
- LED Type: CREE
- Net Weight:90g

**Power Connection:**

DC3.0~3.2V 350mA / 700mA  
(Constant Current)

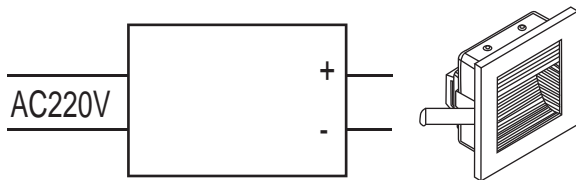

LED Constant Current Power Supply:



Out-put Current: 350mA  
P/N: SLT3-350IS-1



Out-put Current: 700mA  
P/N: SLT3-700IS-1

