




**Product Dimensions:**

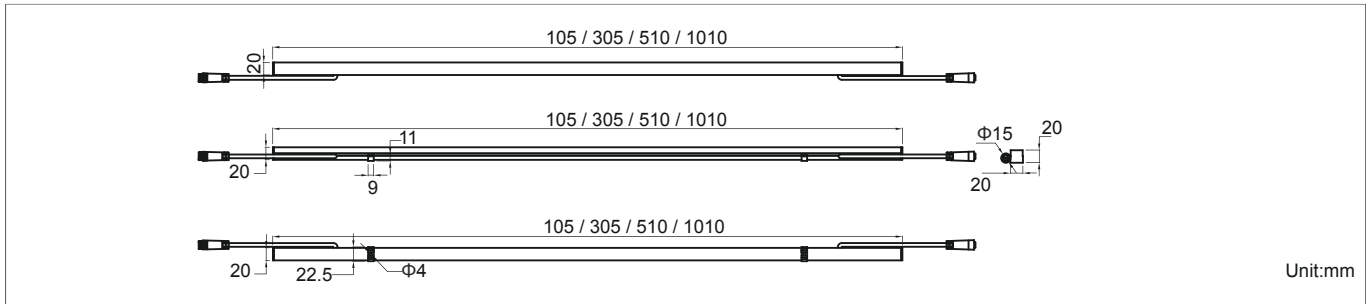

**Luminous Intensity Distribution Diagram:**

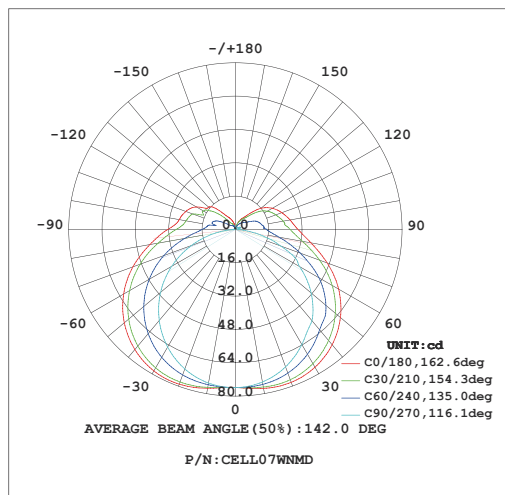

**Lux Distribution:**

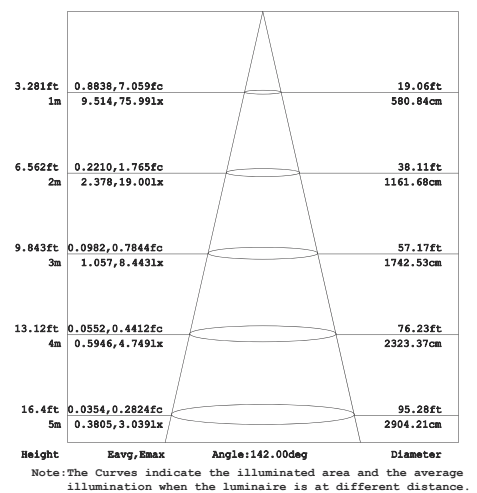

**Manufacturing Quality Standard:**

- ISO 9001:2008

**LED Luminaire Standard:**

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

**Electronic Driver Standard:**

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

**LED Module Standard:**

- IEC 62031
- IEC 60838-2-2

**LED Light Photometric Standard:**

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

**RoHS Standard:**

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

**LED Luminaire Performance:**

- LM-80-08(L70)
- Switching cycle:100,000x

**Features:**

- Surface-mounted Type
- Anode oxidized 6063 aluminum alloy and fully fill in anti-UV silicone epoxy
- Integrated IP67 connectors

**Applications:**


- Outdoor plaza
- The house of contours
- Bridges
- Landscape lighting



**Specifications:**

Power	1W/2W	2W/4W	4W/8W	7W/14W
Size	105mm	305mm	510mm	1010mm
Qty of LED	7PCS	21PCS	35PCS	70PCS
Net Weight	50g	100g	180g	337g
Input Voltage	DC 24V			
Beam Angle	120° / 140°			
Color Rendering Index	80			
Luminaire Efficacy	60lm/w(3000K), 65lm/w(4000K), 70lm/w(6500K)			
LED Source Efficacy	120lm/w(3000K), 130lm/w(4000K), 140lm/w(6500K)			
Operating Temperature	-20°C-50°C			
LED Source	SMD2835			
Life To 70% Lumen Maintain	50,000 Hours			
Operating Humidity	10%-90%RH			
Finishing Materials	Aluminum and Polycarbonate			
Body Color	Matt White			
RAL Color Code	RAL 9003			

**Ordering Part No.:**

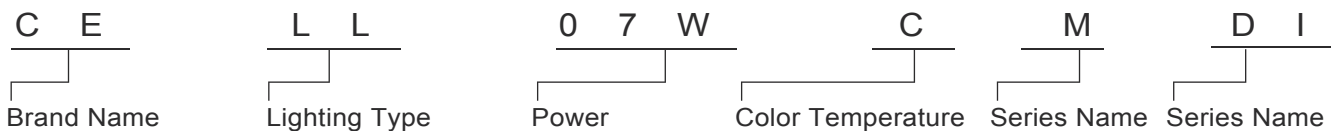

Brand Name	Lighting Type	Power	Color Temperature	Beam Angle	Series Name
CE: CELEX	LL: Linear Light	01W 02W 04W 07W 08W 14W	W: 3000K N: 4000K C: 6500K	S: 120° M: 140°	DI: DENEb I Series