



Luminous Intensity Distribution Diagram:

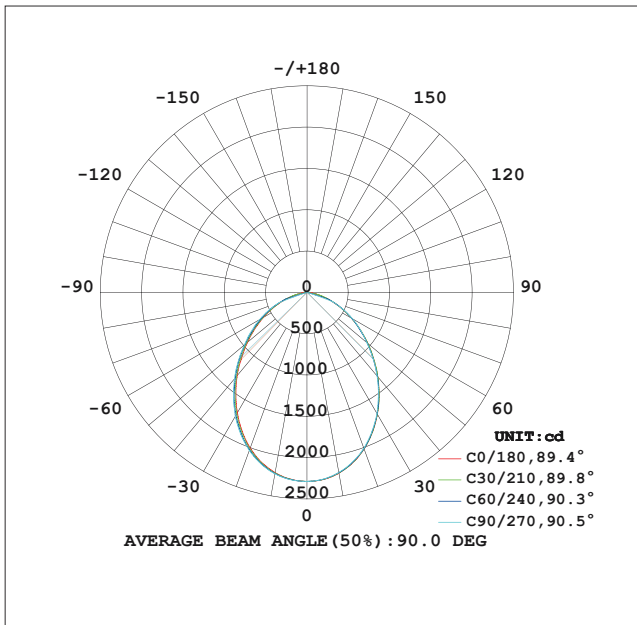

Lux Distribution:

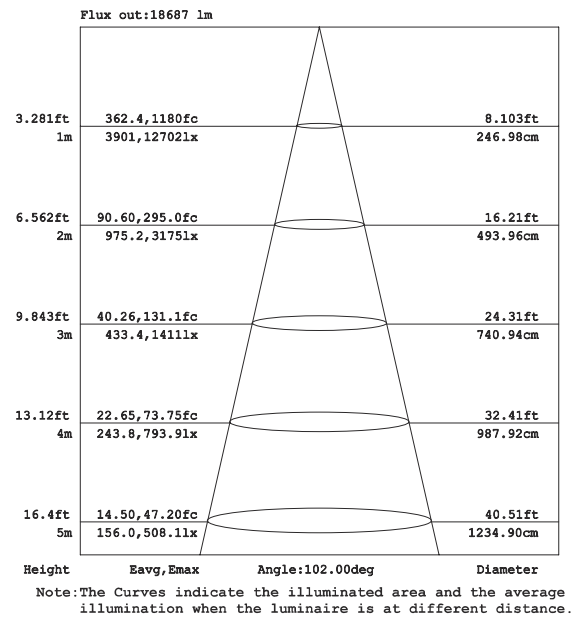

Manufacturing Quality Standard:

- ISO 9001:2008

LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-1
- IEC 62612
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- Switching cycle:100,000x

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; GEN; CIB

Features:

- 1060 aluminum with high corrosion resistance and thermal conductivity
- Free modular serialization and full power range solution
- Module design, convenient for maintenance and assembly
- Ergonomic light distribution to achieve uniform illuminating effect
- All screws and nuts are made of SUS304 stainless steel
- The bracket with adjustable installation angle, multi-holes for installation optional, flexibly to adjust angles according to different requirements

Applications:


- Advertising lighting
- Sports facilities lighting
- Wall and billboard lighting
- Tunnel lighting



Specifications:

Power	40W / 50W	80W / 100W	120W / 150W
Qty of Module	1	2	3
Power	160W / 200W	200W / 250W	
Qty of Module	4	5	
Input Voltage	AC 100-240V 50/60Hz		
Surge Protection	10KV		
Power Factor	0.95		
Beam Angle	60° / 90° / 90°x100°		
Color Rendering Index	≥70		
Luminaire Efficacy	115lm/W (3000K), 120lm/W (4000K), 125lm/W (5000K), 130lm/W (5700K)		
LED Efficacy	140lm/W (3000K), 145lm/W (4000K), 150lm/W (5000K), 160lm/W (5700K)		
LED Source	LUMILEDS		
Operating Temperature	-40°C~50°C		
Operating Humidity	10-90%RH		
LED Lifetime	50,000 Hours		
Finishing Materials	Aluminum Alloy and Anti UV Polycarbonate		
Body Color	Grey		
RAL Color Code	RAL7001		

Ordering Part No.:

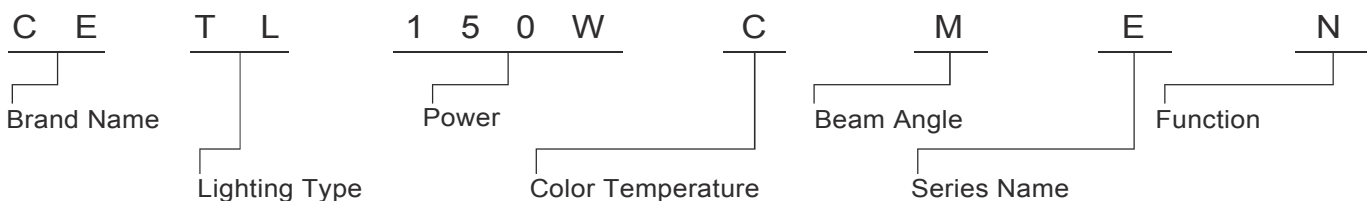

Brand Name	Lighting Type	Power	Color Temperature	Beam Angle	Series Name	Function
CE: CELEX	TL: Tunnel Light	40W 50W 80W 100W 120W 150W 160W 200W 250W	W: 3000K N: 4000K D: 5000K C: 5700K	S: 60° M: 90° L: 90°x100°	E: EDEN Series	N: Switch In(ON/OFF) V:0~10V Dimming D:Dali Dimming P:Programmable

LED Tunnel Light EDEN Series



Product Dimensions:

