






### Product Dimensions:

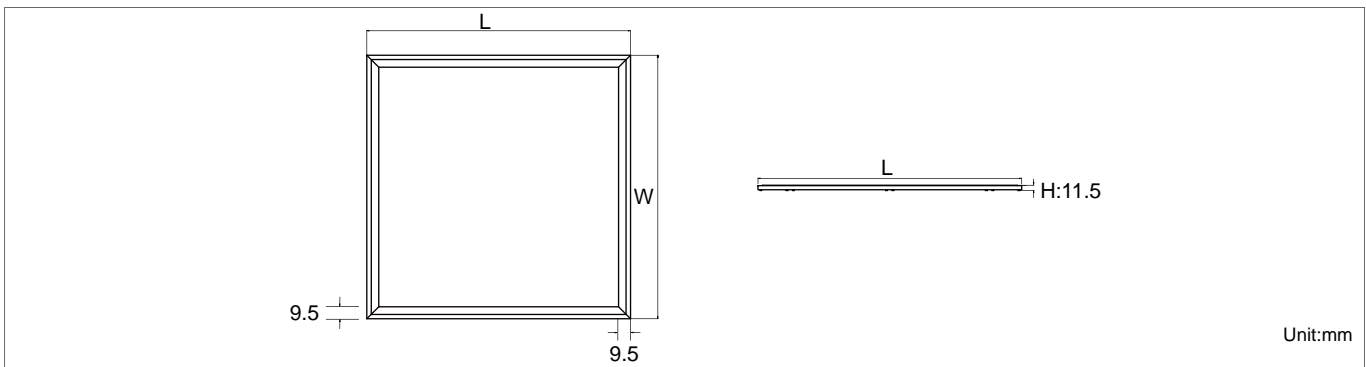

### Luminous Intensity Distribution Diagram:

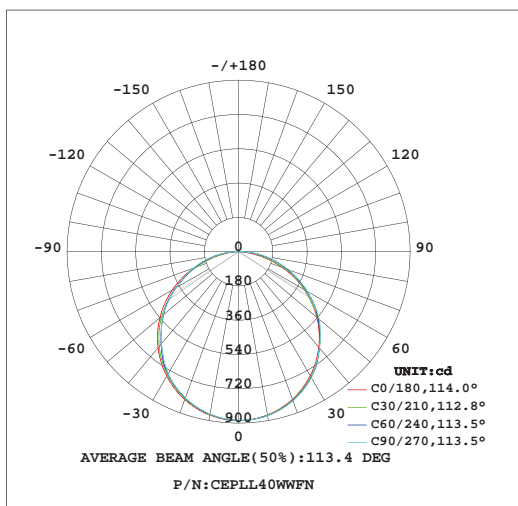

### Lux Distribution:

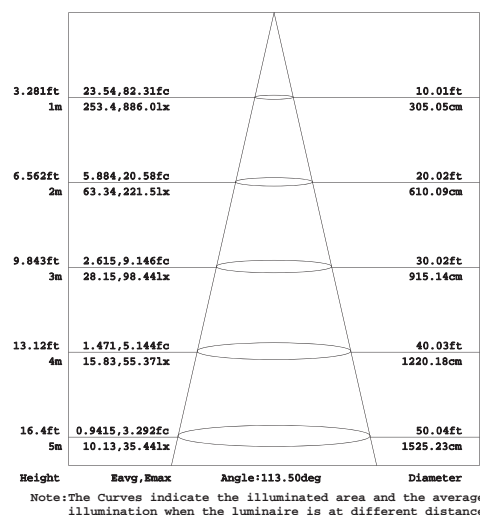

### Manufacturing Quality Standard:

- ISO 9001:2008

### LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471

### LED Module Standard:

- IEC 62031
- IEC 60838-2-2

### Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

### LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

### RoHS Standard:

- EPA3050B
- EN 1122
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270C

### LED Luminaire Performance:

- LM-80-08
- Switching cycle:100,000x

### Features:

- Recessed Type
- Easy to install on Ceiling T Bar
- High efficiency and uniformity of light emission
- Light-efficient power design >0.85
- Good thermal dissipation design
- Cool beam avoids heat degeneration
- Energy saving and environment friendly
- Optional 0~10V dimming driver
- Optional DMX dimming driver
- Optional dali dimming driver

### Applications:


- Area: Indoor use only
- Purpose: Commercial Lighting, Office Lighting, Residential Lighting, Cabinet Lighting etc



### Specifications:

Power	20W	30W	40W	40W/55W	55W/80W
Dimension (LxW mm)	295x295	595x295	595x595	1195x295	1195x595
Input Voltage	AC 100~240V 50/60Hz				
Power Factor	>0.9				
Dimming Control	Triac Leading Edge / DMX 512 / 0~10V / Dali				
Beam Angle	120°				
Color Rendering Index	80				
Luminaire Efficacy	* 75lm/w (2700K), * 80lm/w (3000K), * 95lm/w (4000K), * 100lm/w (5000K), * 105lm/w(6500K)				
LED Source Efficacy	* 95lm/w (2700K), * 100lm/w (3000K), * 110lm/w (4000K), * 115lm/w (5000K), * 120lm/w (6500K)				
Operating Temperature	-20~50°C				
LED Source	Samsung				
Life Time	50,000 Hours				
Operating Humidity	10%~90%RH				
Finishing Materials	Aluminum and Polycarbonate.				
Body Color	Milky White Cover / Silver Trim				

### Ordering Part No.:

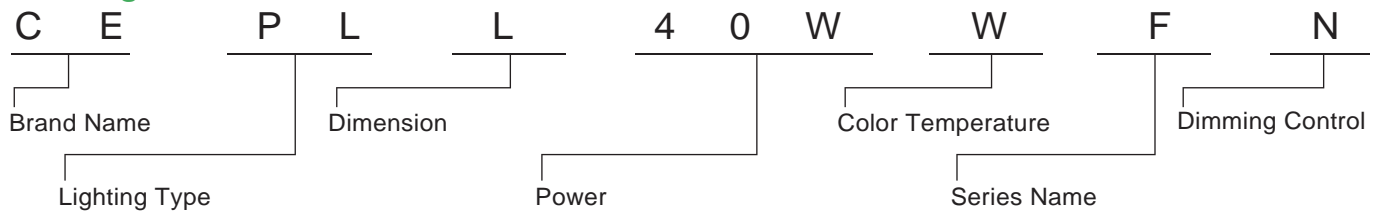

Brand Name	Lighting Type	Dimension (LxW mm)	Power	Color Temperature	Series Name	Dimming Control
CE: CELEX	PL: Panel Light	S:295x295	20W	O:2700K W:3000K N:4000K D:5000K C:6500K	F: Flat Series	D: DMX 512 E: Emergency N: Switch In (ON / OFF) T: Triac Leading Edge V: 0~10V Dimming A: Dali
		M:595x295	30W			
		L:595x595	40W			
		XL:1195x295	40W / 55W			
		XXL: 1195x595	55W / 80W			

### Connection Guide:

