

LED Linear Light FORM VII Series (Pendant Mount Type)




Light Effect




Installation Method:




Pendant (Length: 2m or 4m)
P/N: FORM-VII-P

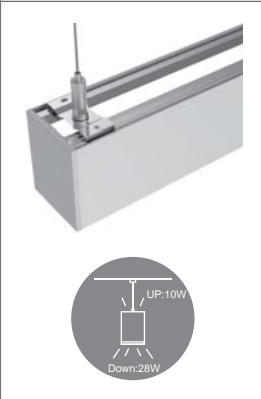

Product Dimensions:

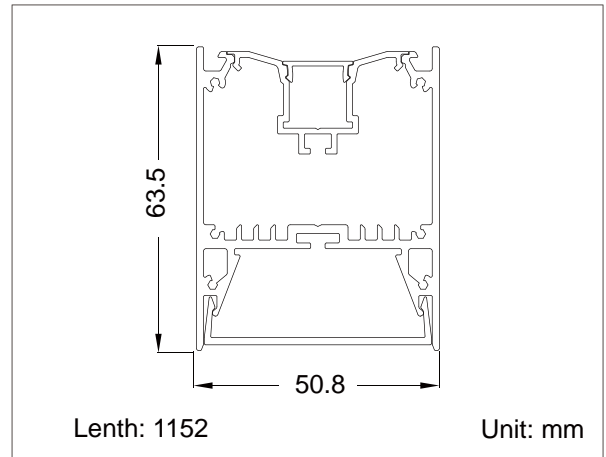

Luminous Intensity Distribution Diagram & Lux Distribution:

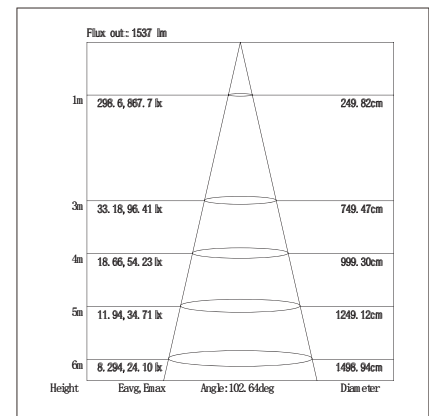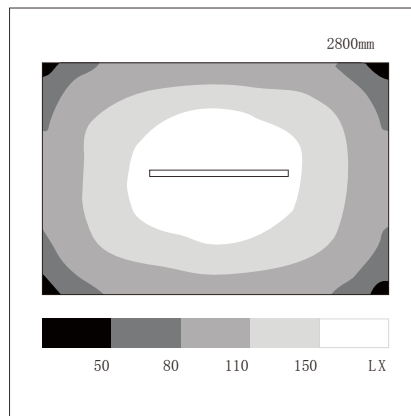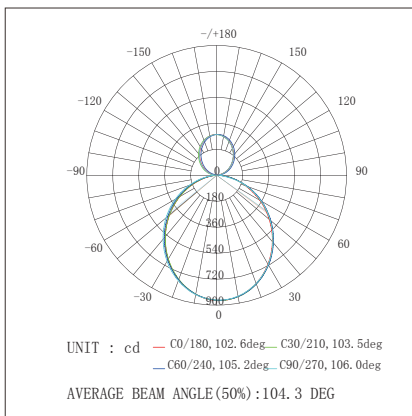

Manufacturing Quality Standard:

- ISO 9001:2008

LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1
- UL

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- L70
- Switching cycle:100,000x

Features:

- Integrated-type LED driver
- Adopts aluminum profile and PC end-caps with no screw, made redesign to get the double emitting effect which based on the origin structure.
- Optimized the anti-leakage design, and the modularized installation method with the emitting design according to aluminum profile to make sure the lighting uniformity with no dazzle.
- Internal power supply with high safe, high efficient and no strobo flash features

Applications:


- Ballrooms
- Office Rooms
- Hotel Lounges
- Corridor
- Shopping Mall



Specifications:

Power	38W (10W up light / 28W down light)
Size(length)	1152mm
Input Voltage	AC 100~277V 50/60Hz
Power Factor	>0.95
Beam Angle	65°(up light) / 105°(down light)
Color Rendering Index	80
Luminaire Efficacy	80lm/w(2700K), 85lm/w(3000K), 95lm/w(4000K), 100lm/w(5000K), 105lm/w(6500K)
LED Source Efficacy	90lm/w (2700K), 95lm/w (3000K), 110lm/w (4000K), 115lm/w (5000K), 120lm/w(6500K)
LED Source	Taiwan
Life Time	50,000 Hours at Ta=25°C
Operating Temperature	-20°C~70°C
Operating Humidity	0~90%RH
Installation	Pendant
Finishing Materials	Extruded Aluminium Alloy and UV Resistive PC
Body Color	Silver / White / Black
RAL Color Code	RAL 9006 / RAL 9003 / RAL 9017

Ordering Part No.:

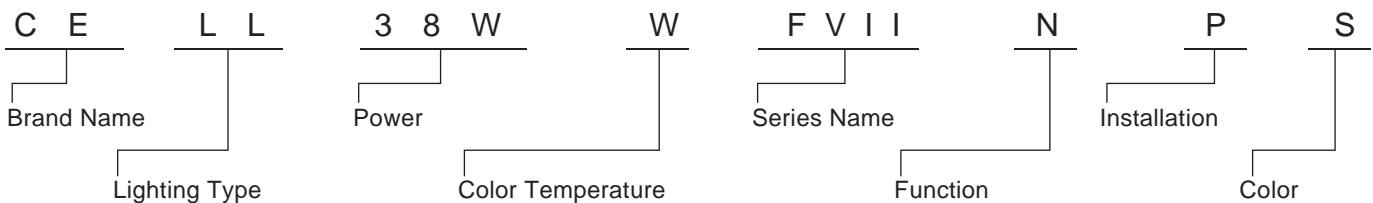

Brand Name	Lighting Type	Power	Color Temperature	Series Name	Function	Installation	Color
CE: CELEX	LL: Linear Light	38W	O: 2700K W: 3000K N: 4000K D: 5000K C: 6500K	FVII: FORM VII Series	D:DMX 512 Dimming E:Emergency(3hrs) N:Switch In T:Triac Dimming Leading Edge V:1~10V Dimming I: Dali Dimming	P: Pendant	S: Silver W: White B: Black