




Luminous Intensity Distribution Diagram:

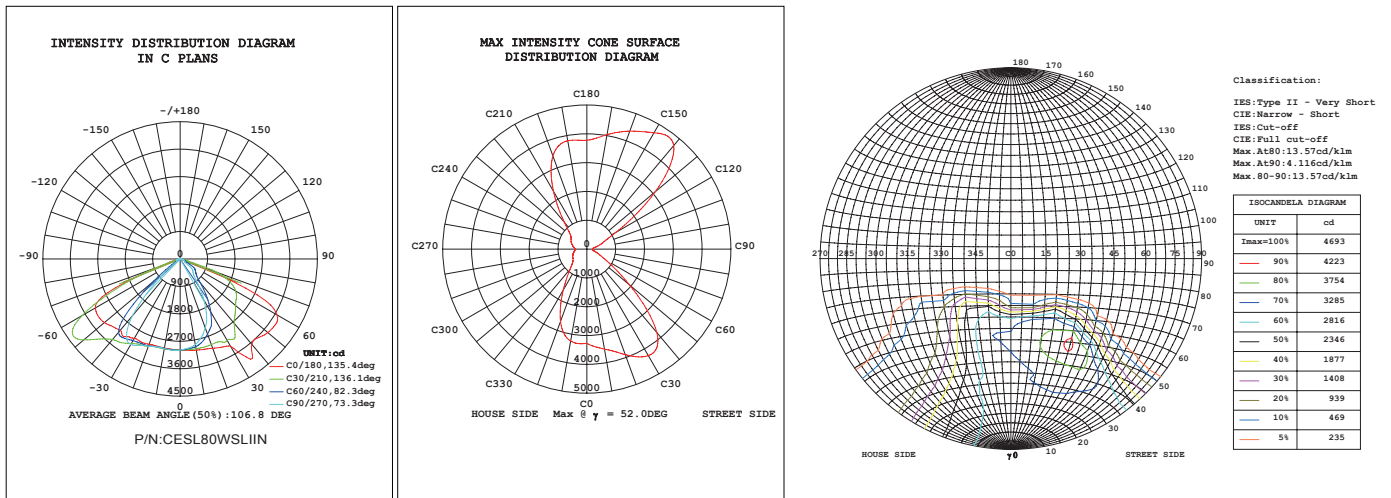

Manufacturing Quality Standard:

- ISO 9001:2008

LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- Switching cycle: 100,000x

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

Features:

- Driver and LED module are removable for maintenance and replacement
- High-pressure aluminum housing with oxidation
- Adjustable hole module for special installation
- Prismatic lens diffuser for wide light distribution
- High power factor and power efficiency design
- Built-in constant current LED power supply

Applications:


- Park Light
- Street Light
- Road Light



Specifications:

Power	60W / 80W	90W / 120W	120W / 160W	150W / 200W	180W / 240W
Qty of Module	2	3	4	5	6
Input Voltage	AC 180-305V 50/60Hz				
Surge Protection	10KV				
Power Factor	>0.95				
Beam Angle	70° x 150°				
Color Rendering Index	≥70				
Luminaire Efficacy	115lm/W(3000K), 120lm/W(4000K), 125lm/W(5000K), 130lm/W(6500K)				
LED Efficacy	140lm/W(3000K), 145lm/W(4000K), 150lm/W(5000K), 160lm/W(6500K)				
LED Source	LUMILEDS				
Operating Temperature	-40°C~50°C				
Operating Humidity	10-90%RH				
LED Lifetime	50,000 Hours				
Finishing Materials	Aluminum Alloy and Anti UV Polycarbonate				
IK Index	IK08				
Body Color	Silver Grey				
RAL Color Code	RAL7001				


Ordering Part No.:

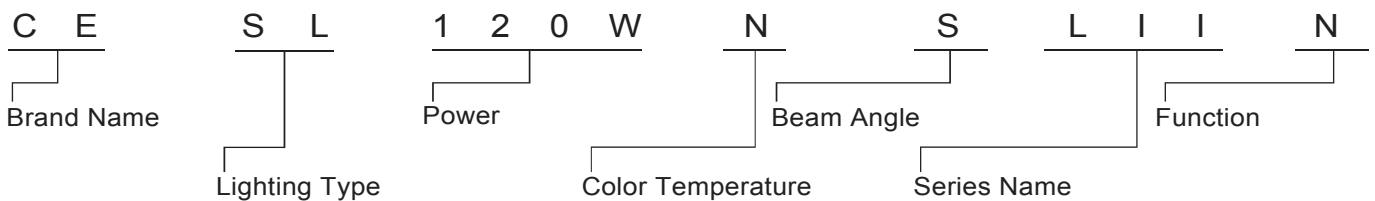


Brand Name	Lighting Type	Power	Color Temperature	Beam Angle	Series Name	Function
CE: CELEX	SL: Street Light	60W 160W 80W 180W 90W 200W 120W 240W 150W	W: 3000K N: 4000K D: 5000K C: 6500K	S: 70° x 150°	LII: LEGO II Series	N: Switch In(ON/OFF) V:0~10V Dimming D:Dali Dimming P:Programmable

Product Dimensions:


Power: 60W / 80W

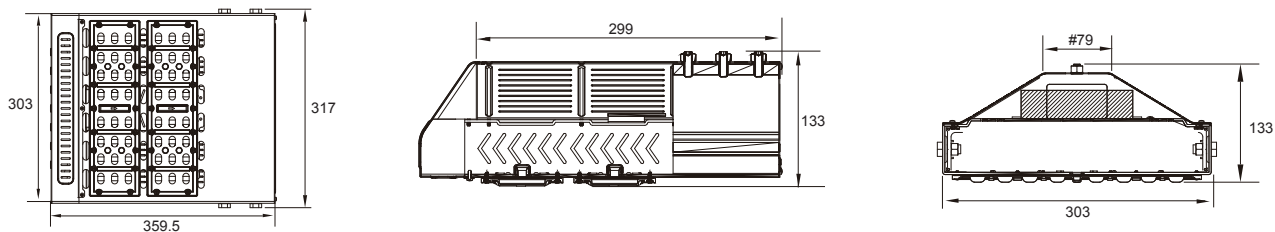


Power: 90W / 120W

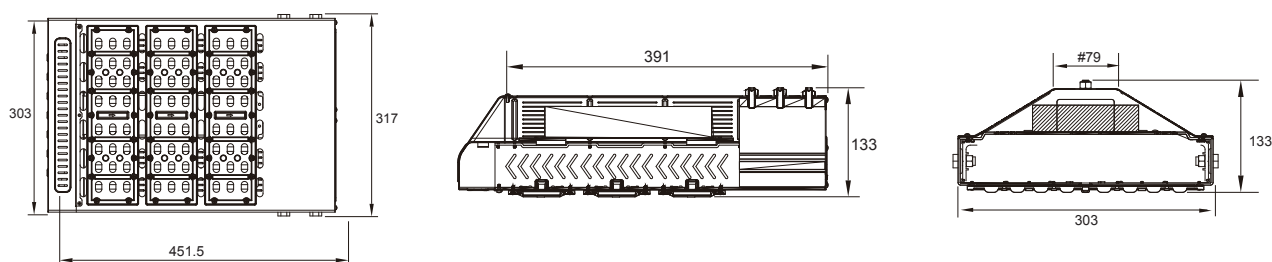

Power: 120W / 160W

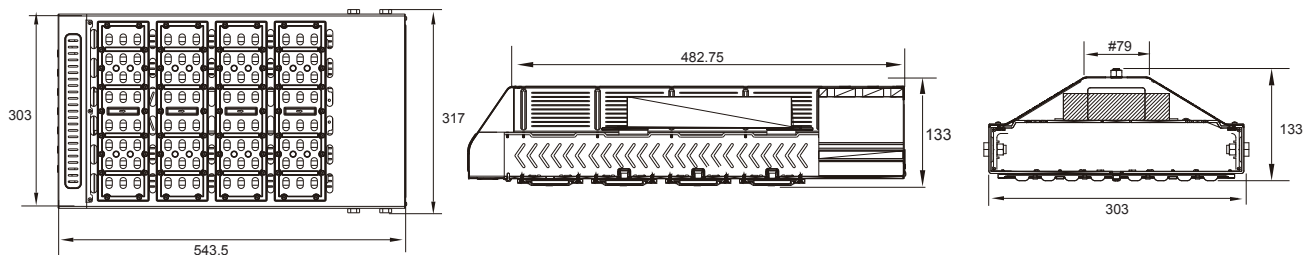

Power: 150W / 200W

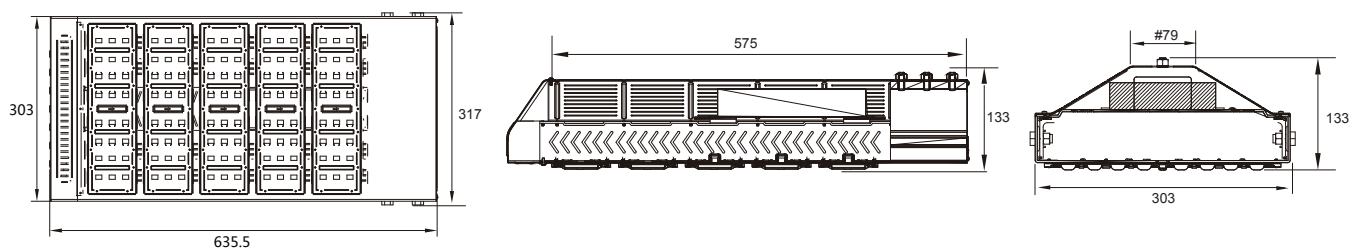

Power: 180W / 240W

