



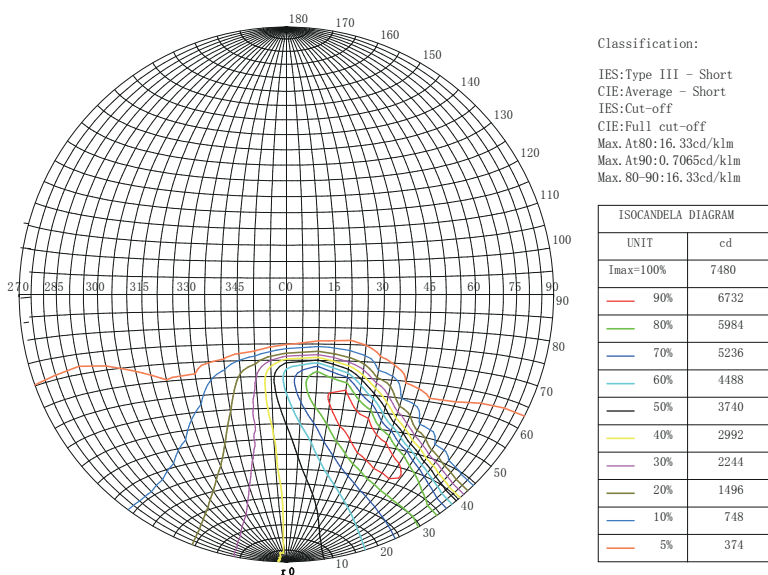

Luminous Intensity Distribution Diagram:

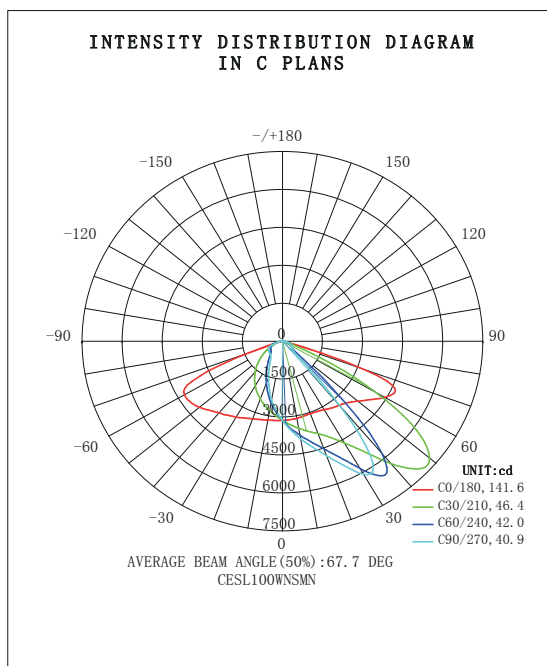

Manufacturing Quality Standard:

- ISO 9001:2008

LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- Switching cycle: 100,000x

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; GEN; CIB

Features:

- Driver and LED module are removable for maintenance and replacement
- High-pressure die-casting aluminum housing with oxidation
- Adjustable hole module for special installation
- Prismatic lens diffuser for wide light distribution
- High power factor and power efficiency design
- Built-in constant current LED power supply

Applications:


- Park Light
- Street Light
- Road Light



Specifications:


Power	80W	100W	120W	150W	160W	200W
Qty of Module	2		3		4	
Power	200W		250W		300W	
Qty of Module	5			6		
Input Voltage	AC 100-240V 50/60Hz					
Surge Protection	10KV					
Power Factor	0.95					
Beam Angle	60°x135° / 85°x135° / 110°					
Color Rendering Index	≥70					
Luminaire Efficacy	125lm/W(3000K), 130lm/W(4000K), 135lm/W(5000K), 140lm/W(5700K)					
LED Efficacy	150lm/W(3000K), 155lm/W(4000K), 160lm/W(5000K), 170lm/W(5700K)					
LED Source	NICHIA					
Operating Temperature	-40°C~50°C					
Operating Humidity	10-90%RH					
LED Lifetime	50,000 Hours					
Finishing Materials	Aluminum Alloy and Anti UV Polycarbonate					
IK Index	IK08					
Body Color	Silver Grey					
RAL Color Code	RAL7001					

Ordering Part No.:

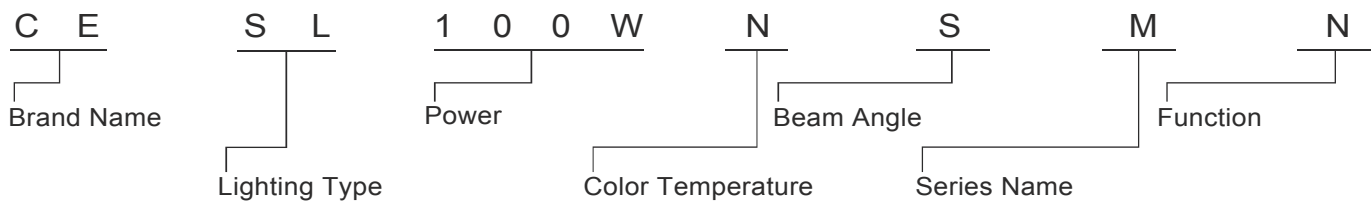


Brand Name	Lighting Type	Power	Color Temperature	Beam Angle	Series Name	Function
CE: CELEX	SL: Street Light	80W 100W 120W 150W 160W 200W 240W 250W 300W	W: 3000K N: 4000K D: 5000K C: 5700K	S: 60°x135° M: 85°x135° L : 110°	M: MELIA Series	N: Switch In(ON/OFF) V:0~10V Dimming D:Dali Dimming P:Programmable


Product Dimensions:

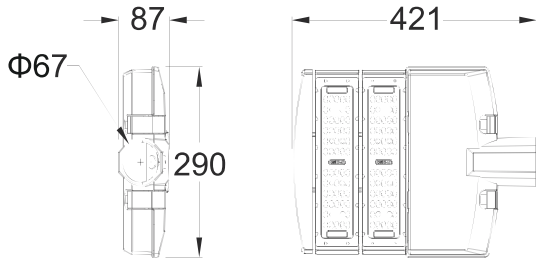


POWER:80W/100W

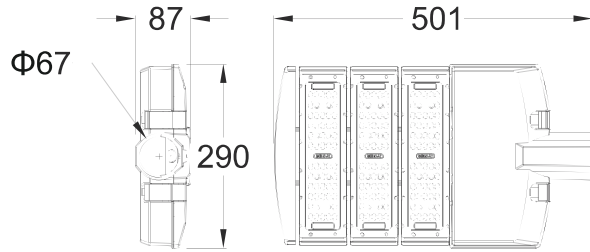


POWER:120W/150W

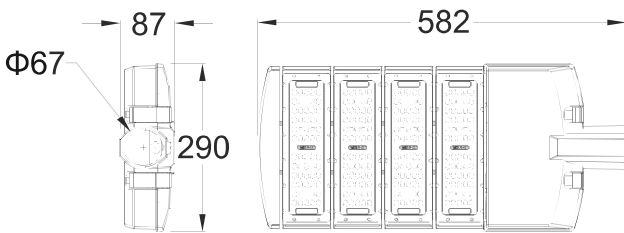

POWER:160W/200W

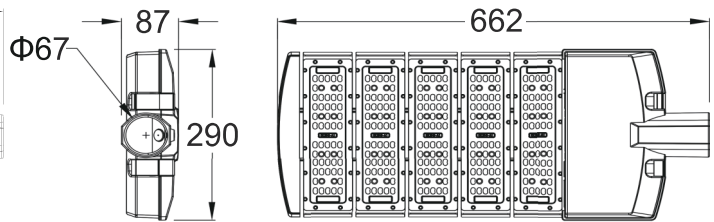

POWER:200W/250W

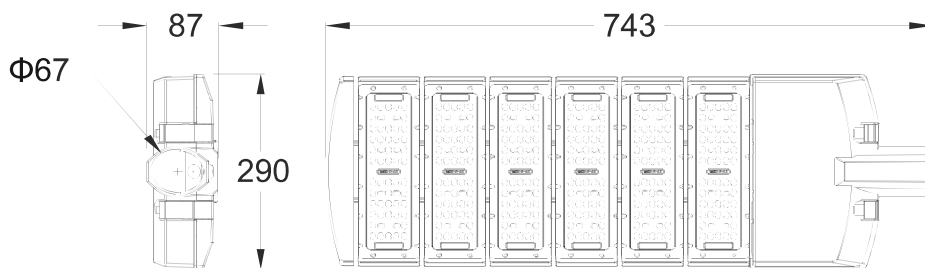

POWER:240W/300W

Unit: mm