






Product Dimensions:

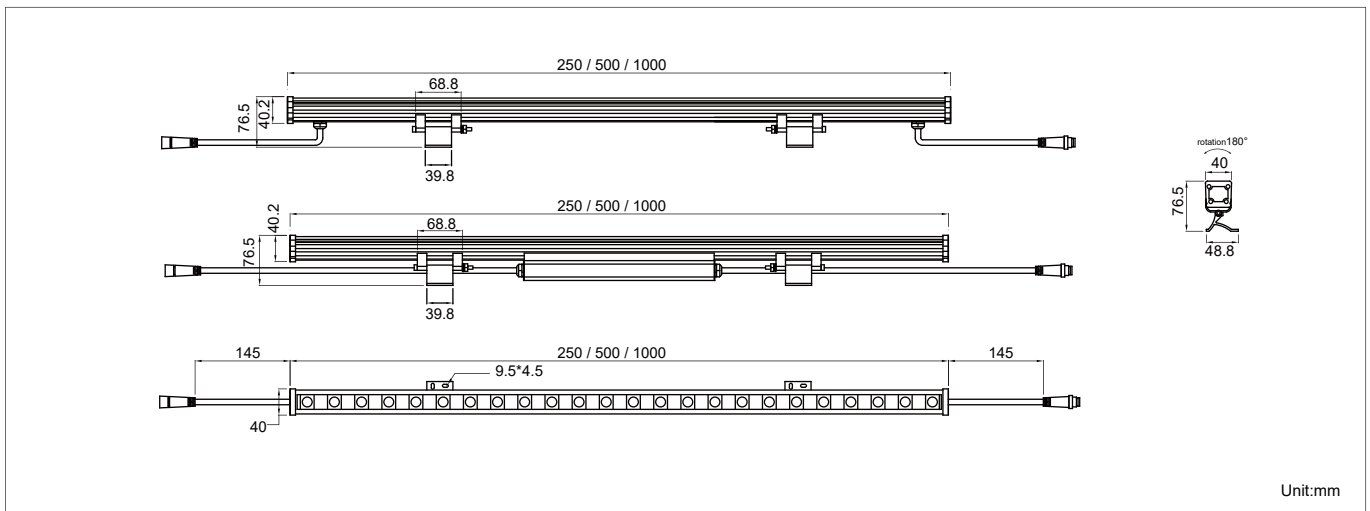

Luminous Intensity Distribution Diagram:

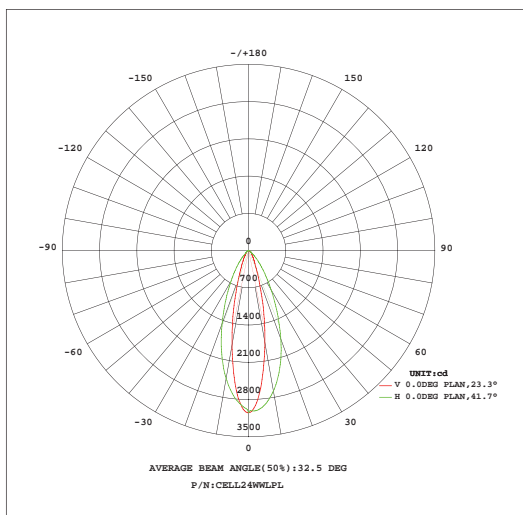

Lux Distribution:

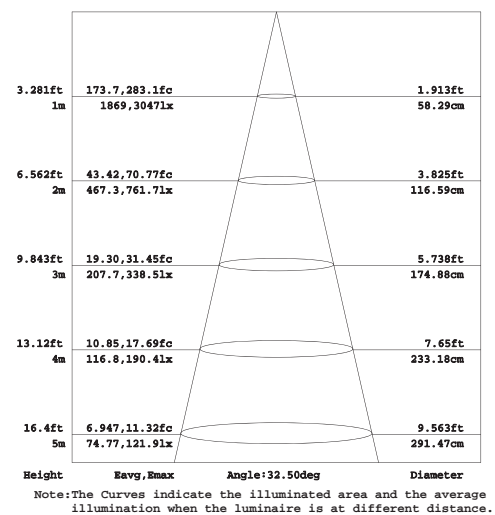

Manufacturing Quality Standard:

- ISO 9001:2008

LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-1
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- Switching cycle: 100,000x



Features:

- #6063 aluminum alloy housing with anode oxidation
- Optional PMMA lens for light distribution
- Remote-type LED driver
- Unique female/male connector IP67
- Optional 1~10V driver for dimming control
- Optional dali driver for dimming control
- Optional DMX driver for dimming control
- Optional battery kit for emergency lighting
- Optional DMX driver for DMX512 dimming control

Applications:


- Facade Lighting
- Building Outline
- Bridge Outline



Specifications:

Power	6W	8W	12W	15W	24W	30W
Qty of LEDs	6PCS	8PCS	12PCS	15PCS	24PCS	36PCS
Dimension (L)	250mm		500mm		1000mm	
Net Weight	0.6kg		1.0kg		1.34kg	
Input Voltage	DC 24V / AC 100~240V 50/60Hz					
Power Factor	>0.9					
Total Harmonic Distortion	<15%					
Control	DMX512 / Dali					
Beam Angle	15° / 25° / 30° / 45° / 60° / 10°x40° / 10°x80° / 30°x65°					
Color Rendering Index	80					
Luminaire Efficacy	70lm/w(2700K), 75lm/w(3000K), 80lm/w(4000K), 90lm/w(5000K), 90lm/w(6500K)					
LED Source Efficacy	110lm/w(2700K), 115lm/w(3000K), 120lm/w(4000K), 130lm/w(5000K), 130lm/w(6500K)					
Operating Temperature	-20°C~70°C					
LED Source	CREE					
Life Time	50,000 Hours					
Operating Humidity	0%~99%RH					
Finishing Materials	Aluminum and Safety Glass					
Body Color	Matte Black / Matte Silver					
RAL Color Code	RAL 7031 / RAL 6016					

Ordering Part No.:

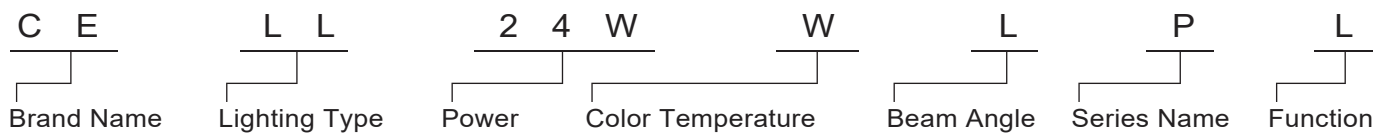

Brand Name	Lighting Type	Power	Color Temperature	Beam Angle	Series Name	Function
CE: CELEX	LL: Linear Light	06W 08W 12W 15W 24W 30W	O: 2700K W: 3000K N: 4000K D: 5000K C: 6500K	S:15° M:25° L:30° W:45° X:60° XL:10°x40° XXL:10°x80° XXXL:30°x65°	P: PAZA Series	D: DMX 512 Dimming L: DC 24V T: Triac Dimming Leading Edge V: 1~10V Dimming N: AC 100~240V A: Dali