




Luminous Intensity Distribution Diagram:

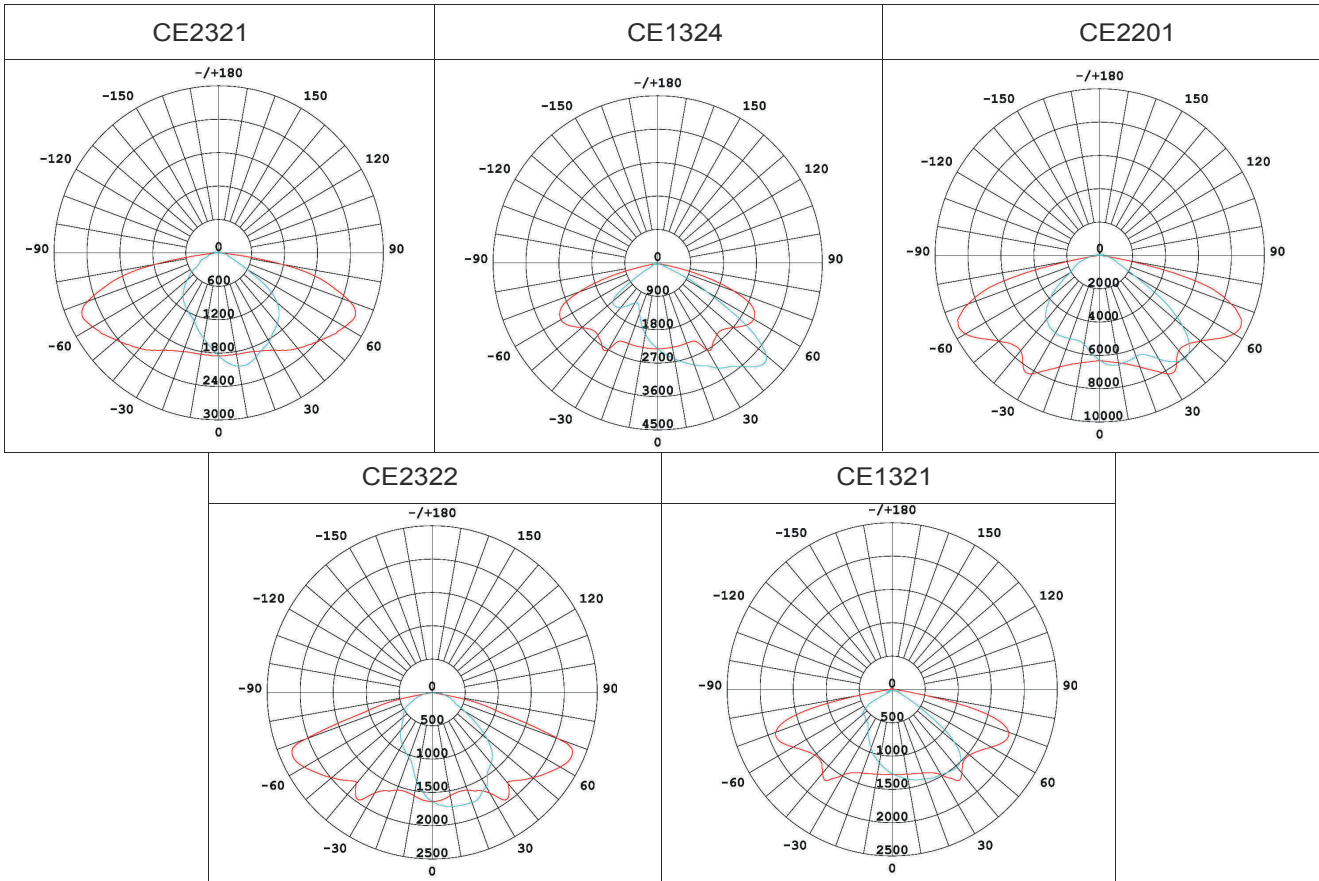

Manufacturing Quality Standard:

- ISO 9001:2008

LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- Switching cycle:100,000x

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; GEN; CIB

Features:

- Die-cast and extruded aluminum housing
- IP68 LED optical module, screw-free design
- Module design, air convection effect, good thermal management system
- Ergonomic light distribution to achieve uniform illuminating effect
- Intelligent constant current driver

Applications:


- Park Light
- Street Light
- Road Light



Specifications:

Power	40W	50W	80W	100W	120W	150W	160W	200W
Qty of Module	1		2		3		4	
Power	200W		250W		300W		350W	
Qty of Module	5			6			7	
Input Voltage	AC 100-240V 50/60Hz							
Surge Protection	10KV							
Power Factor	0.95							
Beam Angle	CE2321 / CE1324 / CE2201 / CE2322 / CE1321							
Color Rendering Index	≥70							
Luminaire Efficacy	115lm/W(3000K), 120lm/W(4000K), 125lm/W(5000K), 130lm/W(5700K)							
LED Efficacy	140lm/W(3000K), 145lm/W(4000K), 150lm/W(5000K), 160lm/W(5700K)							
LED Source	LUMILEDS							
Operating Temperature	-40°C~50°C							
Operating Humidity	10-90%RH							
LED Lifetime	50,000 Hours							
Finishing Materials	Aluminum Alloy and Anti UV Polycarbonate							
IK Index	IK08							
Body Color	Grey							
RAL Color Code	RAL7001							

Ordering Part No.:

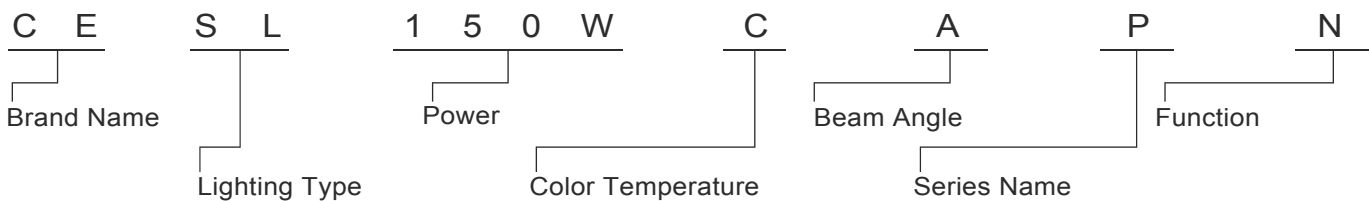


Brand Name	Lighting Type	Power	Color Temperature	Beam Angle	Series Name	Function
CE: CELEX	SL: Street Light	40W 50W 80W 100W 120W 150W 160W 200W 240W 250W 280W 300W 350W	W: 3000K N: 4000K D: 5000K C: 5700K	A: CE2321 B: CE1324 C: CE2201 D: CE2322 E: CE1321	P: PEAK Series	N: Switch In(ON/OFF) V:0~10V Dimming D:Dali Dimming P:Programmable


LED Street Light PEAK Series




Product Dimensions:

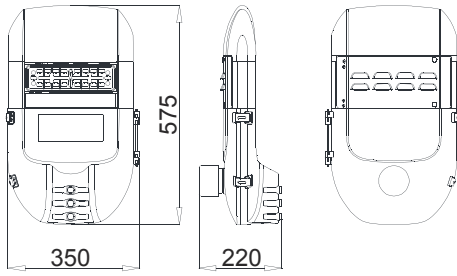


POWER:40W/50W

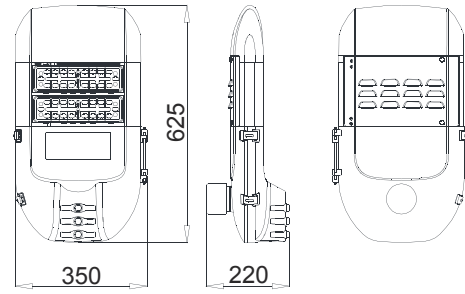


POWER:80W/100W

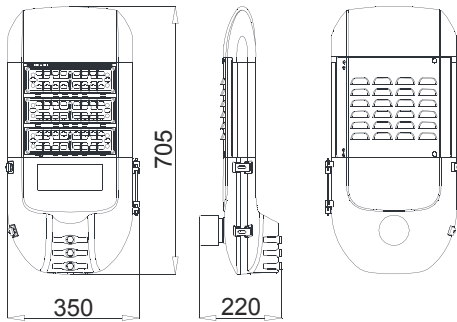


POWER:120W/150W

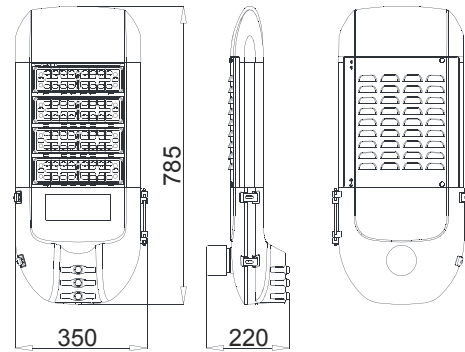


POWER:160W/200W

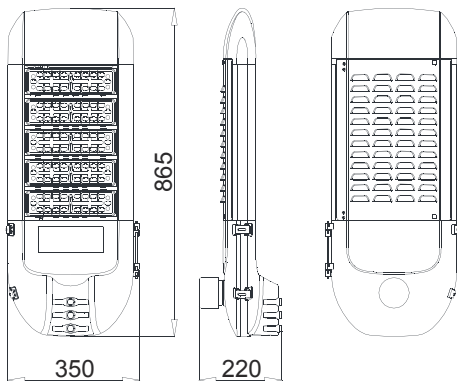


POWER:200W/250W

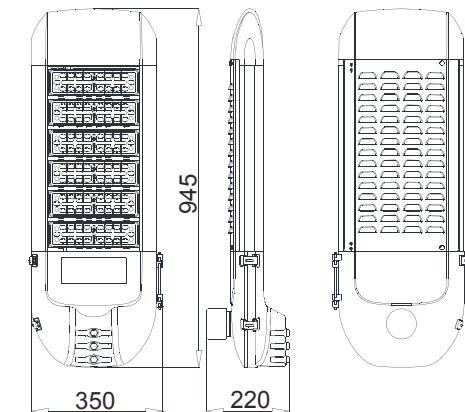

POWER:240W/300W

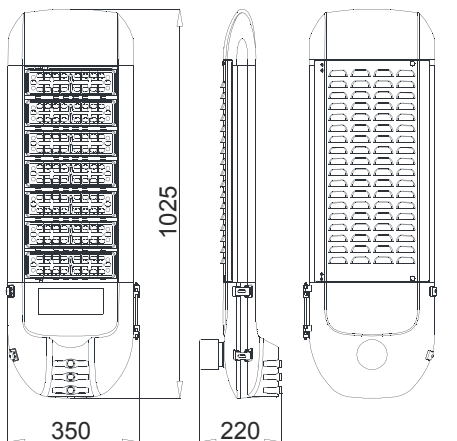

POWER:280W/350W

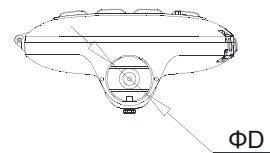

ΦD Installation Diameter 60-70mm