






Product Dimensions:

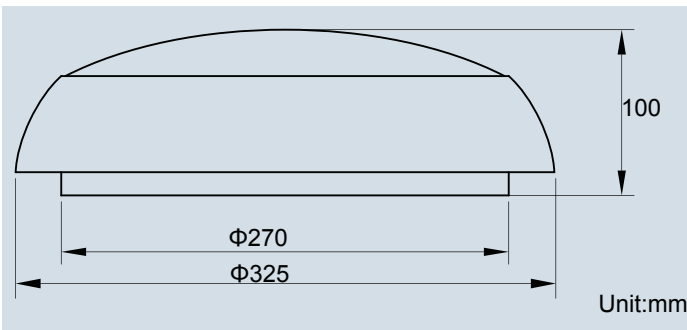

Luminous Intensity Distribution Diagram:

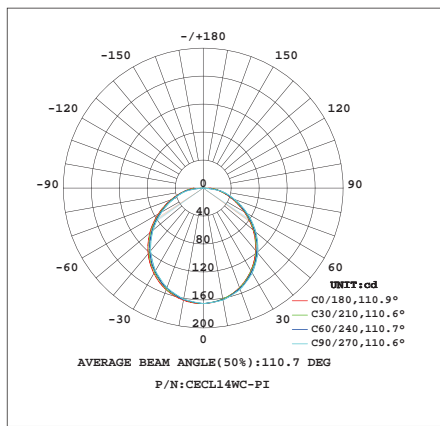

Lux Distribution:

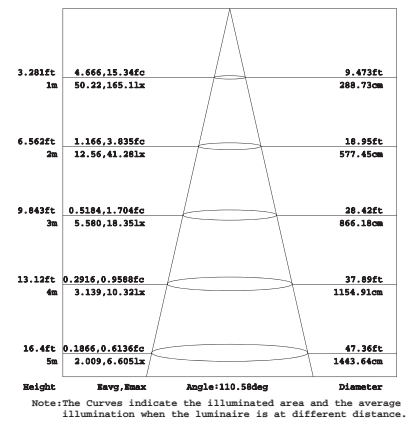

Manufacturing Quality Standard:

- ISO 9001:2008

LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- Switching cycle: 100,000x

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

Features:

- 7W ceiling light can replace 13W compact fluorescent lamp ceiling light
- 9W ceiling light can replace 16W compact fluorescent lamp ceiling light
- 14W ceiling light can replace 26W compact fluorescent lamp or 22W T5 or 32W T8 ceiling light
- Wall-mounted & ceiling mounted
- Each LED module is independent working
- Polycarbonate cover for uniform illumination
- Lumen depreciation: <5% after 10,000 hours
- Lumen depreciation: <30% after 50,000 hours
- High power factor and power efficiency design
- Fuse terminal design for short circuit protection
- Built-in constant current power supply
- 1~10V optional dimmable function

Applications:

- Commercial building
- Corridor and staircase
- Home use
- Car parks



Specifications:

Part No	CCT (K)	Beam Angle	Color Rendering Index	Luminaire Luminous Flux (lm)	Luminaire Efficacy (lm/w)	LED Source (lm)	Power (W)
CECL07WO-PI	2700	120°	80	490	70	770	7
CECL07WW-PI	3000	120°	80	525	75	805	7
CECL07WN-PI	4000	120°	80	560	80	840	7
CECL07WC-PI	6500	120°	80	595	85	875	7
CECL09WO-PI	2700	120°	80	630	70	990	9
CECL09WW-PI	3000	120°	80	675	75	1035	9
CECL09WN-PI	4000	120°	80	720	80	1080	9
CECL09WC-PI	6500	120°	80	765	85	1170	9
CECL14WO-PI	2700	120°	80	980	70	1540	14
CECL14WW-PI	3000	120°	80	1050	75	1610	14
CECL14WN-PI	4000	120°	80	1120	80	1680	14
CECL14WC-PI	6500	120°	80	1190	85	1820	14

General And Electrical Characteristics:

- Input Voltage: AC 220~240V or 100~120V (50/60Hz)
- Power Factor: 0.95
- Total Harmonic Distortion: 20%
- Operating Temperature: -20°C~50°C
- Operating Humidity: 0~95%
- Life Time: 50,000 Hours at Ta=40°C
- LED Source: Taiwan SMD
- Finishing Materials: Polycarbonate Cover
- Body Color: Milky White
- Net Weight: 1.8kg

Installation Guide:

