






Product Dimensions:

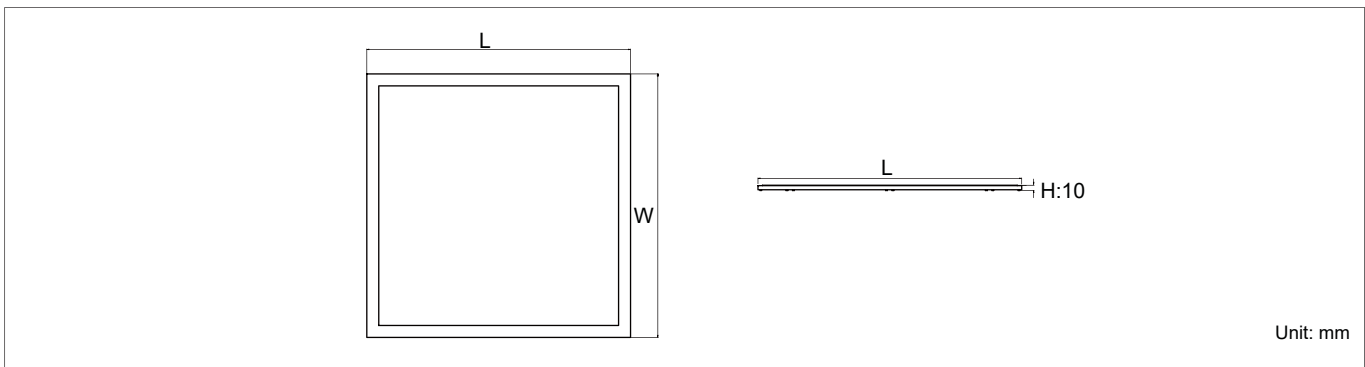

Luminous Intensity Distribution Diagram:

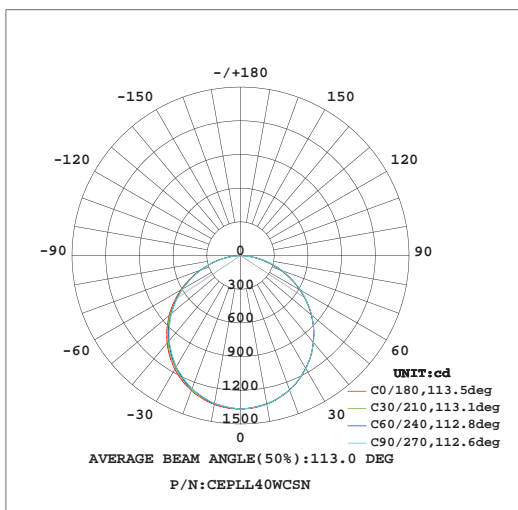

Lux Distribution:

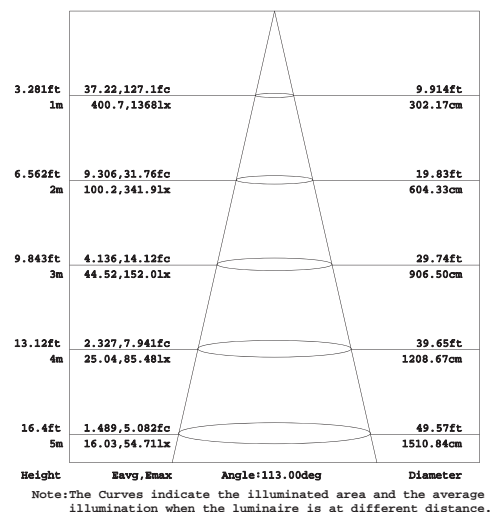

Manufacturing Quality Standard:

- ISO 9001:2008

LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

RoHS Standard:

- EPA3050B
- EN 1122
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270C

LED Luminaire Performance:

- LM-80-08
- Switching cycle: 100,000x

Features:

- Recessed Type
- Easy to install on Ceiling T Bar
- High efficiency and uniformity of light emission
- Light-efficient power design >0.85
- Good thermal dissipation design
- Cool beam avoids heat degeneration
- Energy saving and environment friendly
- Optional 1~10V dimming driver

Applications:


- Area: Indoor use only
- Purpose: Commercial Lighting, Office Lighting, Residential Lighting, Cabinet Lighting etc



Specifications:


Power	20W	40W	40W	72W
Dimension (mm)	295x595	295x1195	595x595	595x1195
Input Voltage	AC 220~240V 50/60Hz			
Power Factor	>0.9			
Dimming Control	Triac Leading Edge / 1~10V			
Beam Angle	120°			
Color Rendering Index	80			
Luminaire Efficacy	85lm/w (3000K), 90lm/w(4000K), 95lm/w(6000K)			
LED Source Efficacy	120lm/w (3000K), 130lm/w (4000K), 140lm/w (6000K)			
Operating Temperature	-20~50°C			
Life Time	50,000 Hours			
Operating Humidity	10%~90%RH			
Finishing Materials	Aluminum and Polycarbonate.			
Body Color	Milky White Cover / Silver Trim			

Ordering Part No.:

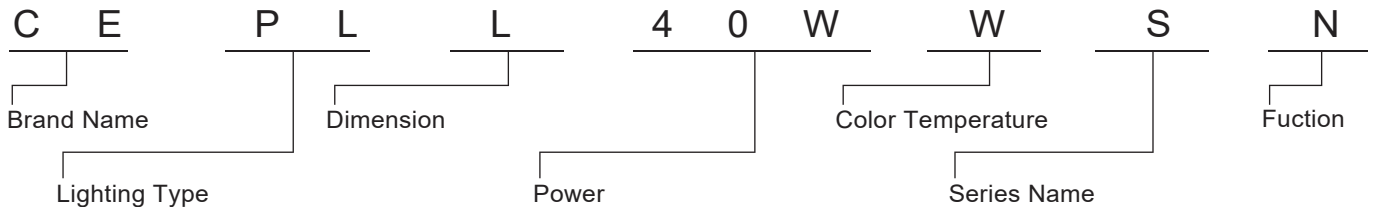


Brand Name	Lighting Type	Dimension (mm)	Power	Color Temperature	Series Name	Fuction
CE: CELEX	PL: Panel Light	S: 295x595	20W	W: 3000K N: 4000K C: 6000K	S: SCREEN Series	E: Emergency N: Switch In (ON / OFF) T: Triac Leading Edge V: 1~10V Dimming
		M: 295x1195	40W			
		L: 595x595	40W			
		XL: 595x1195	72W			


Installation:

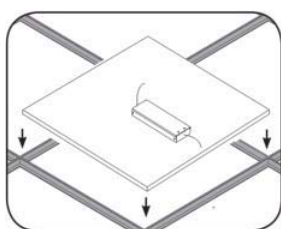

Grid Embedded



Ceiling Mounted

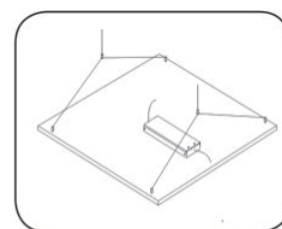

Ceiling Hanging