



Accessory: Anti-glare shield


Product Dimensions:

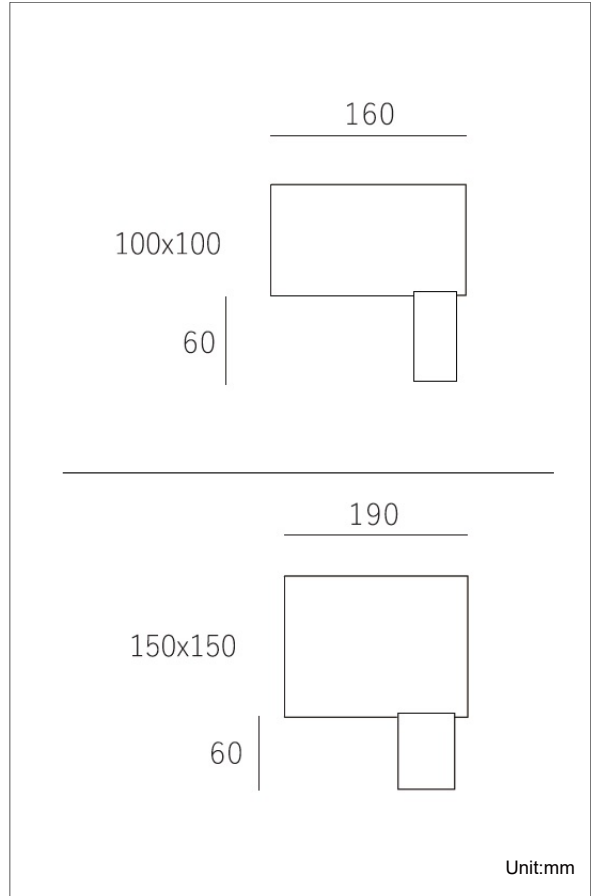

Luminous Intensity Distribution Diagram:

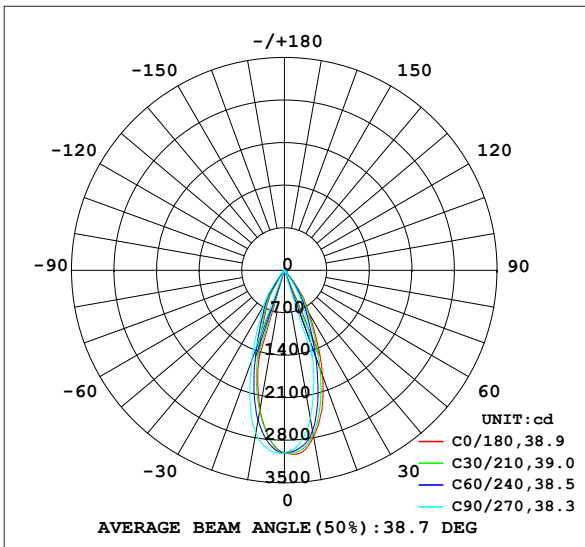

Lux Distribution:

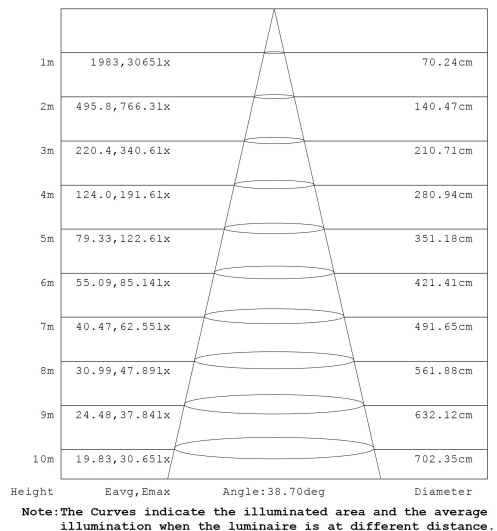

Manufacturing Quality Standard:

- ISO 9001:2008

LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- Switching cycle:100,000x

**Features:**

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- Dupont outdoor electrostatic powder painting.
- #304 standard stainless steel fastness part.
- 3mm thickness tempered glass.
- Fire-resistance silicon seal gasket.
- Anodized aluminium reflector.

**Applications:**


- Public squares
- Parks
- Building
- Hotel



**Specifications:**

Power	20W / 30W / 45W
Input Voltage	AC 220~240V 50/60Hz
Power Factor	>0.95
Beam Angle	15° / 24° / 36°
Color Rendering Index	80
Housing Materials	Aluminum and Tempered Glass
Luminaire Efficacy	70lm/w (3000K), 75lm/w (4000K), 80lm/w (6500K)
LED Source Efficacy	90lm/w (3000K), 95lm/w (4000K), 100lm/w (6500K)
Operating Temperature	-20~50°C
LED Source	CREE
Life Time	50,000 Hours at Ta=40°C
Operating Humidity	10%~90%RH
Body Color	Matte Black / Matte Grey
RAL Color Code	RAL9017 / RAL9007

**Ordering Part No.:**

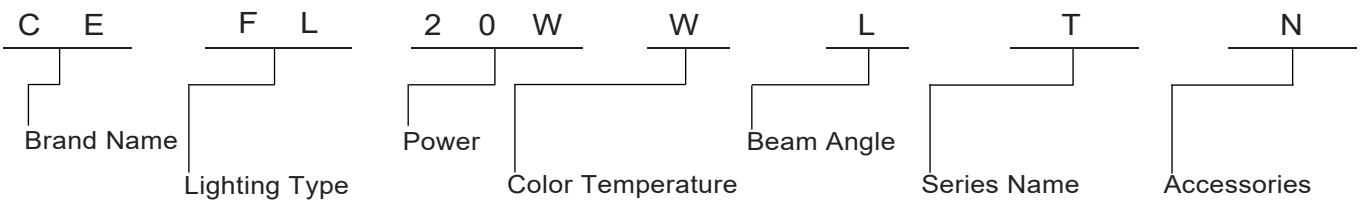

Brand Name	Lighting Type	Power	Color Temperature	Beam Angle	Series Name	Accessories
CE: CELEX	FL: Flood Light	20W 30W 45W	W: 3000K N: 4000K C: 6500K	M: 15° L: 24° X: 36°	T: Thor Series	N: No Cap C: Cap