






## Product Dimensions:

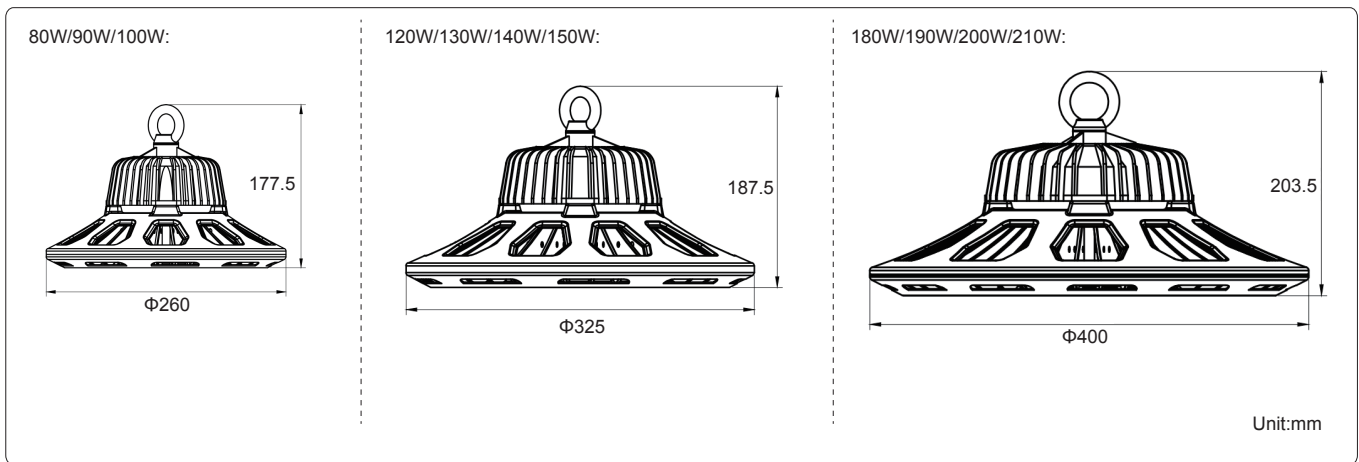

## Luminous Intensity Distribution Diagram:

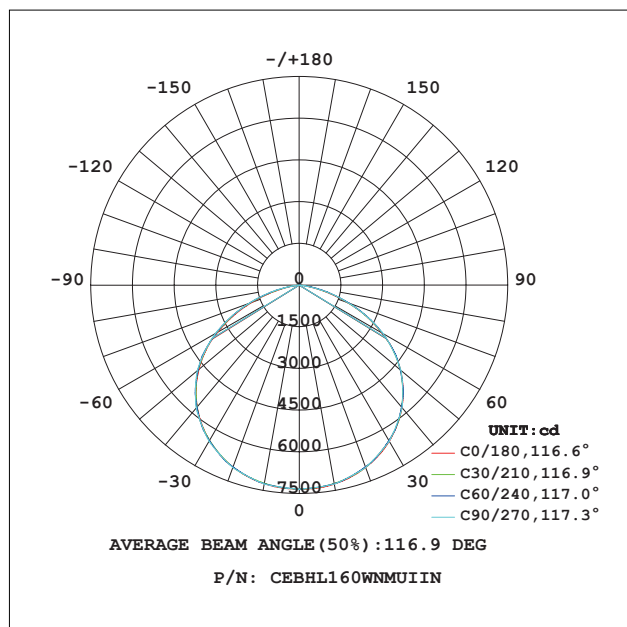

## Lux Distribution:

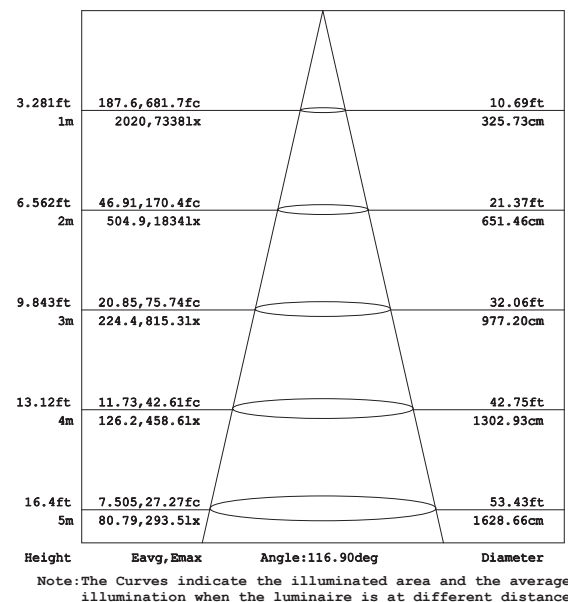

### Manufacturing Quality Standard:

- ISO 9001:2008

### LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

### Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

### LED Module Standard:

- IEC 62031
- IEC 60838-2-2

### LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

### RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

### LED Luminaire Performance:

- LM-80-08
- Switching cycle: 100,000x

**Features:**

- High performance thermal management design ensuring low LED junction temperature
- Easy installation and maintenance, dust prevention, longer lifetime with high lumen maintenance
- The entire housing coated by electrophoretic paint, excellent corrosion resistance
- High power factor and power efficiency design

**Applications:**


- Industrial space: logistic warehouses, and food & drink processing plant.
- Business space: Large-scale specialty shops, shopping mall, convention center, and so on.
- Public space: Gymnasium, indoor stadium, underground parking, etc
- Logistics center: Warehouses and logistics center, etc



**Specifications:**

Power	80W/90W/100W	120W/130W/140W/150W	180W/190W/200W/210W
Input Voltage	AC 100~277V 50/60Hz		
Power Factor	>0.95		
Beam Angle	60° / 90° / 120°		
Color Rendering Index	>80		
Luminaire Efficacy	115lm/w (3000K), 120lm/w (4000K), 125lm/w (6500K)		
LED Source Efficacy	130lm/w (3000K), 140lm/w (4000K), 150lm/w (6500K)		
Operating Temperature	-20°C~50°C		
LED Source	LUMILEDS / LEXTAR / NICHIA		
Life Time	50,000 Hours		
Operating Humidity	0~99%RH		
Finishing Materials	Aluminum / PC Cover		
Body Color	Matte Black		
RAL Color Code	RAL 9004		
Net Weight	2.5kg	3.5kg	5kg

**Ordering Part No.:**

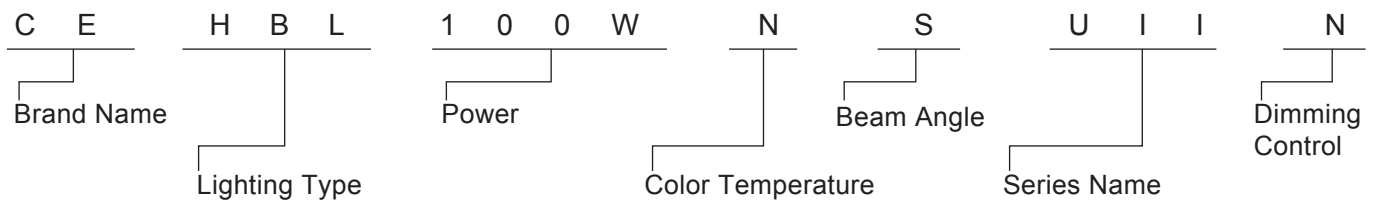

Brand Name	Lighting Type	Power	Color Temperature	Beam Angle	Series Name	Dimming Control
CE: CELEX	HBL: High Bay Light	80W / 90W 100W/120W 130W/140W 150W/180W 190W/200W 210W	W:3000K N: 4000K C: 6500K	S: 60° M: 90° L: 120°	UII: UFO II Series	N:Switch In (ON / OFF) V: 1~10V Dimming D: DALI Dimming