






Product Dimensions:

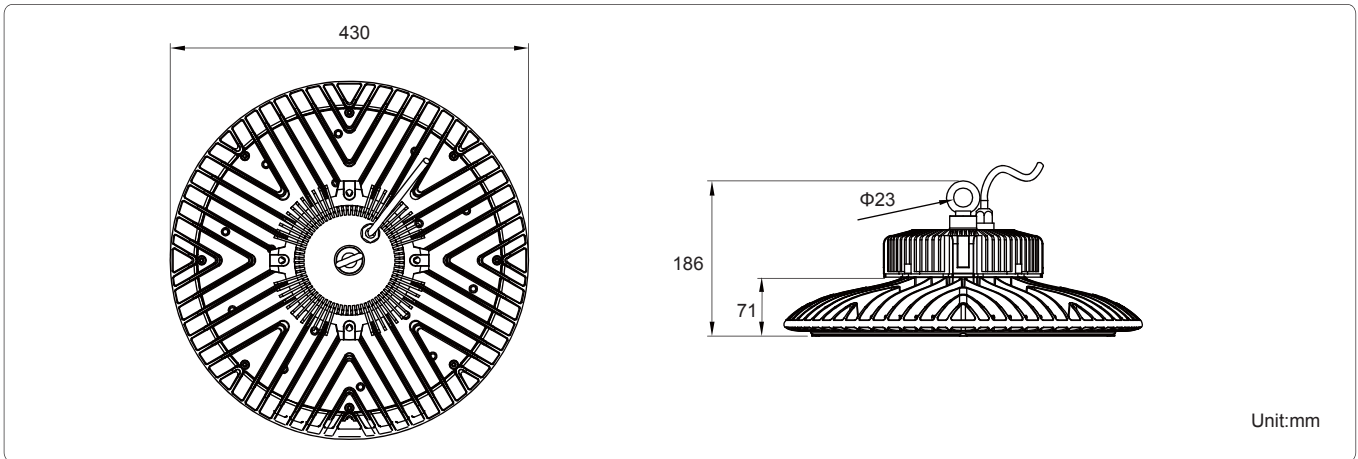

Luminous Intensity Distribution Diagram:

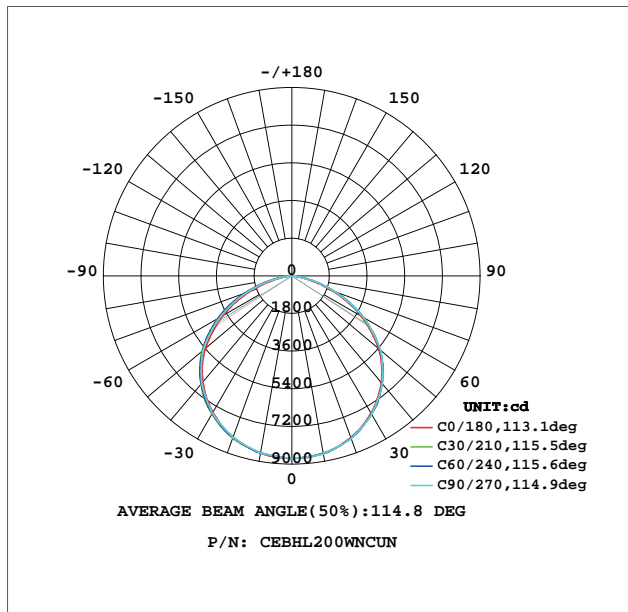

Lux Distribution:

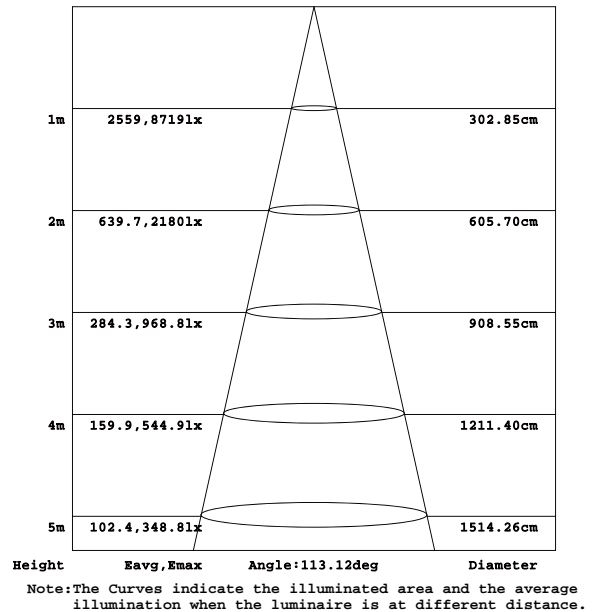

Manufacturing Quality Standard:

- ISO 9001:2008
- **LED Luminaire Standard:**
- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- **LED Module Standard:**
- IEC 62031
- IEC 60838-2-2
- **LED Light Photometric Standard:**
- CIE; TM14; LM-75; IES; LDT; CEN; CIB
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- Switching cycle:100,000x

Features:

- Offer 140 lm/w lumen performance
- High performance thermal management design ensuring low LED junction temperature
- Easy installation and maintenance, dust prevention, longer lifetime with high lumen maintenance
- High pressure die-casting aluminum housing
- High power factor and power efficiency design

Applications:


- Warehouses
- Production and logistic workshops
- Retail stores
- Theme restaurants
- Amusement parks
- Indoor stadiums and public places
- Car Park



Specifications:

Power	200W
Input Voltage	AC 100~240V 50/60Hz
Power Factor	>0.98
Beam Angle	120°
Color Rendering Index	>70
Luminaire Efficacy	110lm/w (3000K), 120lm/w (4000K), 140lm/w (6500K)
LED Source Efficacy	130lm/w (3000K), 140lm/w (4000K), 150lm/w (6500K)
Operating Temperature	-40°C~50°C
LED Source	Philips
Life Time	50,000 Hours
Operating Humidity	0~99%RH
Finishing Materials	Aluminum and Polycarbonate
Body Color	Matte Black
RAL Color Code	RAL 9004
Net Weight	6.2kg

Ordering Part No.:

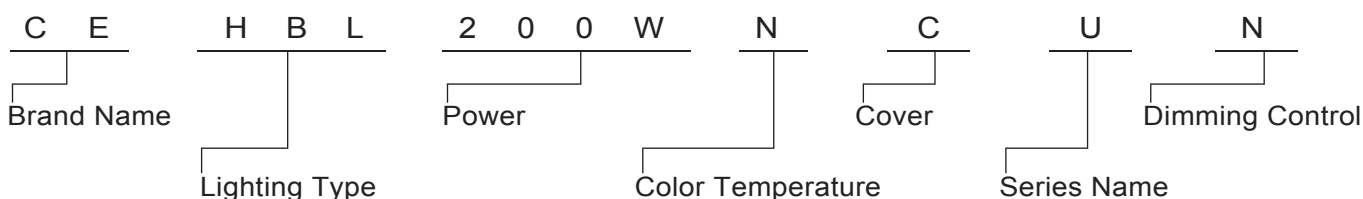

Brand Name	Lighting Type	Power	Color Temperature	Cover	Series Name	Dimming Control
CE: CELEX	HBL: High Bay Light	200W	W: 3000K N: 4000K C: 6500K	C:Clear F:Frosted	U: UFO Series	N:Switch In (ON / OFF) V:0~10V Dimming P:PWM