






Product Dimensions:

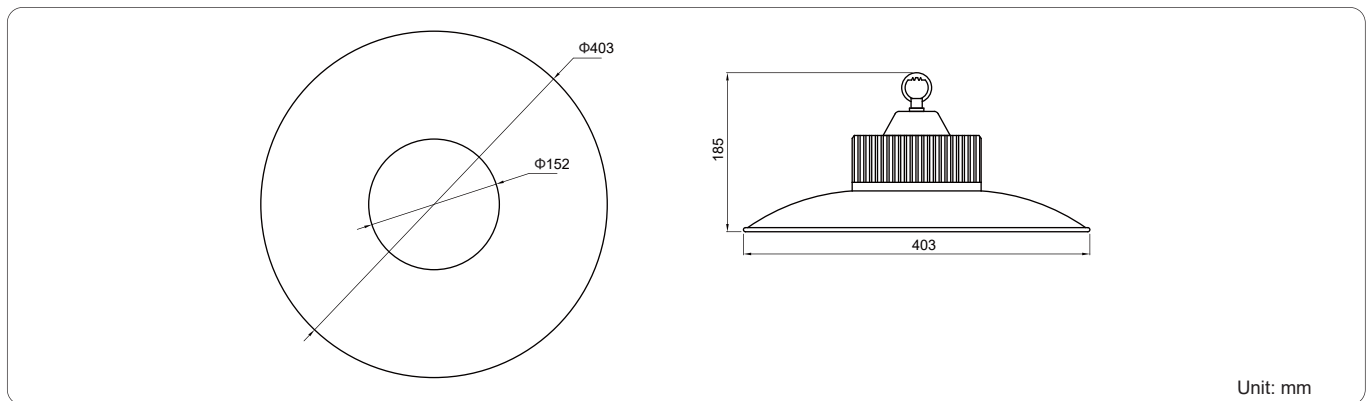

Luminous Intensity Distribution Diagram:

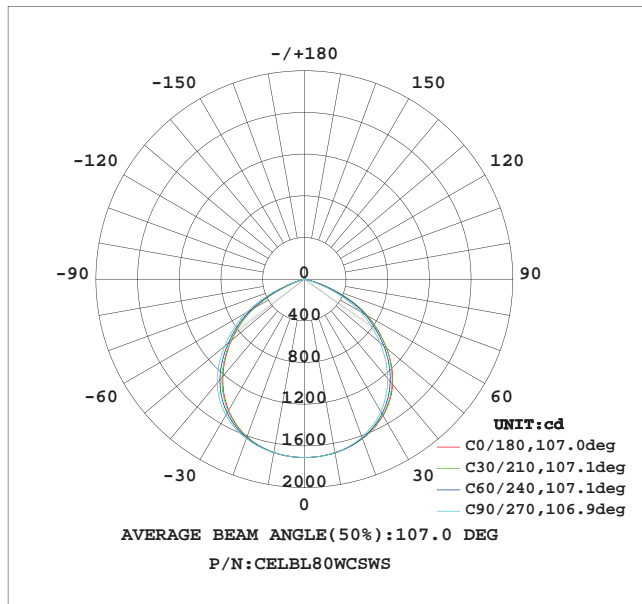

Lux Distribution:

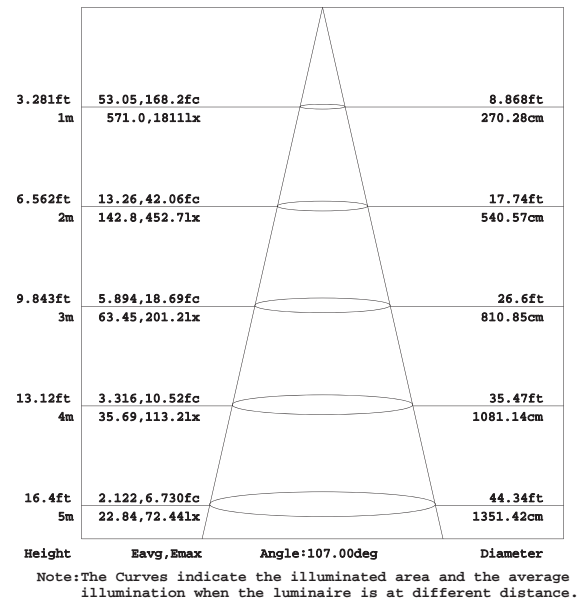

Manufacturing Quality Standard:

- ISO 9001:2008
- LED Luminaire Standard:**
- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- Switching cycle: 100,000x

Features:

- High transmittance diffuser and quality grade aluminum casing; wide irradiating area with affluent brightness and light uniformity effect; no dark rims.
- Smart and Elegant design appearance. Dust, pest and water seepage proof with anti-fog and haze effects.
- Without any hazardous materials such as Mercury, Lead and so on.
- High-quality LED light source – low light decay, long life span.
- Use of high efficiency constant current driver with stable performance on fast start and variable voltage input benefits.

Applications:


- Household
- Office
- Hotel
- School
- Hospital



Specifications:

Power	80W
Input Voltage	AC 100~240V 50/60Hz
Beam Angle	110°
Color Rendering Index	>70
Luminaire Efficacy	70lm/w (3000K), 80lm/w (4000K), 90lm/w (6500K)
LED Source Efficacy	110lm/w (3000K), 120lm/w (4000K), 130lm/w (6500K)
Operating Temperature	-20°C~50°C
Life Time	15,000 Hours
Operating Humidity	0~99%RH
Finishing Materials	Aluminum and Polycarbonate
Body Color	Matte Silver
RAL Color Code	RAL 9006
Net Weight	1060g

Ordering Part No.:

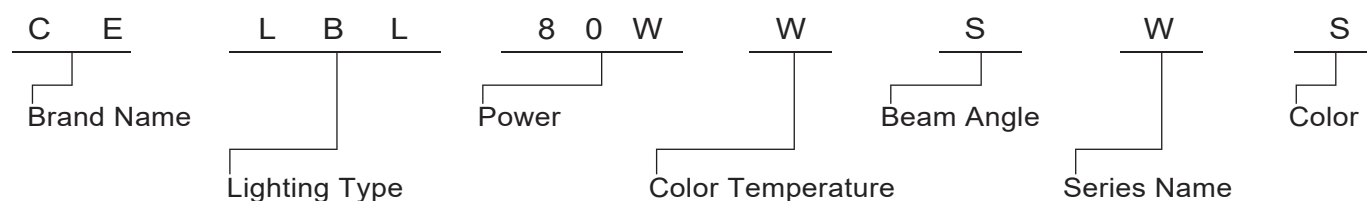

Brand Name	Lighting Type	Power	Color Temperature	Beam Angle	Series Name	Color
CE: CELEX	LBL: Low Bay Light	80W	W: 3000K N: 4000K C: 6500K	S: 110°	W: WOOFER Series	S: Matte Silver